

ARRL Laboratory

Expanded Test-Result Report

ICOM IC-756

Prepared by:

American Radio Relay League, Inc.
Technical Department Laboratory
225 Main St.
Newington, CT 06111
Telephone: (860) 594-0210
Web Site: <http://www.arrl.org/>
Internet email: mtracy@arrl.org

Order From:

American Radio Relay League, Inc.
Technical Department Secretary
225 Main St.
Newington, CT 06111
Telephone: (860) 594-0278
Internet email: reprints@arrl.org

Price:

\$7.50 for ARRL Members, \$12.50 for non-Members, postpaid.


Model Information:

Model: IC-756 Serial #: 01238
QST "Product Review": May 1997

Manufacturer:

ICOM America, Inc
2380 116th Ave NE
PO Box C-90029
Bellevue, WA 98004
USA

Phone: 206-454-8155
206-450-6088 (literature)
800-858-6252
Fax: 206-454-1509
Web Site: <http://www.icomamerica.com>

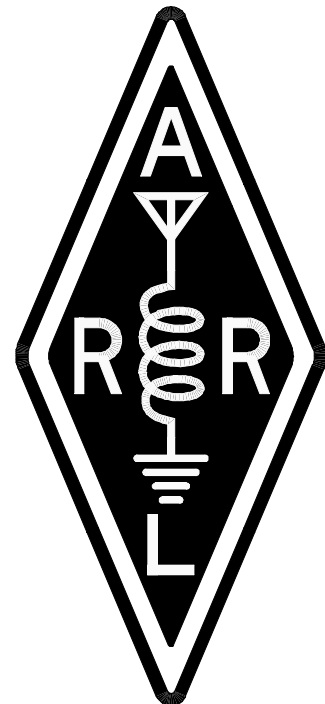

List of Tests:

(Page numbers are omitted because the length of the report varies from unit to unit.)

Introduction

Transmitter Tests:

Transmit Output Power
Transverter Jack Output Power
Current Consumption
Transmit Frequency Range
Spectral Purity
Transmit Two-Tone IMD
Carrier and Sideband Suppression
CW Keying Waveform
Transmit Keyer Speed
SSB/FM Transmit Delay
Transmit/Receive Turnaround
Transmit Composite Noise

Receiver Tests:

Noise Floor (Minimum Discernible Signal)
Receive Frequency Range
AM Sensitivity
FM Sensitivity
Blocking Dynamic Range
Two-Tone, Third-Order Dynamic Range and Intercept Point
Two-Tone, Second-Order Intercept Point
In-Band Receiver IMD
FM Adjacent Channel Selectivity
FM Two-Tone, Third-Order IMD Dynamic Range
Image Rejection
IF Rejection
Audio Output Power
IF + Audio Frequency Response
Squelch Sensitivity
S-Meter Accuracy and Linearity
In-Band Receiver IMD
Notch Filter
Audio Filter
Receiver bandpass

Followup Tests:

Temperature Chamber Test Description
Duty Cycle Test Description

Appendix

Comparative Table

Introduction:

This document summarizes the extensive battery of tests performed by the ARRL Laboratory for each unit that is featured in *QST* "Product Review." For all tests, there is a discussion of the test and test method used in ARRL Laboratory testing. For most tests, critical conditions are listed to enable other engineers to duplicate our methods. For some of the tests, a block diagram of the test setup is included. The ARRL Laboratory has a document, the *ARRL Laboratory Test Procedures Manual*, that explains our specific test methods in detail, with a test description similar to the one in this report, a block diagram showing the specific equipment currently in use for each test, along with all equipment settings and a specific step by step procedure used in the ARRL Laboratory. While this is not available as a regular ARRL publication, the ARRL Technical Department Secretary can supply a copy at a cost of \$20.00 for ARRL Members, \$25.00 for non-Members, postpaid.

Most of the tests used in ARRL product testing are derived from recognized standards and test methods. Other tests have been developed by the ARRL Lab. The ARRL Laboratory test equipment is calibrated annually, with traceability to National Institute of Standards and Technology (NIST). Most of the equipment is calibrated by a contracted calibration laboratory. Other equipment, especially the custom test fixtures, is calibrated by the ARRL Laboratory Engineers, using calibrated equipment and standard techniques.

The units being tested are operated as specified by the equipment manufacturer. The ARRL screen room has an ac supply that is regulated to 117 or 234 volts. If possible, the equipment under test is operated from the ac supply. Mobile and portable equipment is operated at the voltage specified by the manufacturer, at 13.8 volts if not specified, or from a fully charged internal battery. Equipment that can be operated from 13.8 volts (nominal) is also tested for function, output power and frequency accuracy at the minimum specified voltage, or 11.5 volts if not specified. Units are tested at room temperature and humidity as determined by the ARRL HVAC system. Also, units that are capable of mobile or portable operation are tested at their rated temperature range, or at -10 to +60 degrees Celsius in a commercial temperature chamber.

ARRL "Product Review" testing represents a sample of only one unit (although we sometimes obtain an extra sample or two for comparison purposes). This is not necessarily representative of all units of the same model number. It is not uncommon that some parameters will vary significantly from unit to unit. The ARRL Laboratory and Product Review editor work with manufacturers to resolve any deviation from specifications or other problems encountered in the review process. These problems are documented in the Product Review.

Units used in "Product Review" testing are purchased off the shelf from major distributors. We take all necessary steps to ensure that we do not use units that have been specially selected by the manufacturer. When the review is complete, the unit is offered for sale in an open mail bid, announced regularly in *QST*.

Related ARRL Publications and Products:

The *1998 ARRL Handbook for Radio Amateurs* has a chapter on test equipment and measurements. The book is available for \$32.00 plus \$6 shipping and handling. The *Handbook* is also now available in a convenient, easy to use CD-ROM format. In addition to the complete *Handbook* text and graphics, the CD-ROM includes a search engine, audio clips, zooming controls, bookmarks and clipboard support. The cost is \$49.95 plus \$4.00 shipping and handling. You can order both versions of the *Handbook* from our Web page, or contact the ARRL Publications Sales Department at 888-277-289 (toll free). It is also widely stocked by radio and electronic dealers and a few large bookstores.

The ARRL Technical Information Service has prepared an information package that discusses Product Review testing and the features of various types of equipment. Request the "What is the Best Rig To Buy" package from the ARRL Technical Department Secretary. The cost is \$2.00 for ARRL Members, \$4.00 for non-Members, postpaid.

Many *QST* "Product Reviews" have been reprinted in three ARRL publications: The *ARRL Radio Buyers Sourcebook* (order #3452) covers selected Product Reviews from 1970 to 1990. The cost is \$15.00 plus \$4.00 shipping and handling. The *ARRL Radio Buyers Sourcebook Volume II* (order #4211) contains reprints of all of the Product Reviews from 1991 and 1992. The cost is \$15.00 plus \$4.00 shipping and handling. The *VHF/UHF Radio Buyer's Sourcebook* (order #6184) contains nearly 100 reviews of transceivers, antennas, amplifiers and accessories for VHF and above. You can order these books from our Web page or contact the ARRL Publications Sales Department to order a copy.

QST is now available on CD ROM! The *1995 ARRL Periodicals CD ROM* (order #5579) and the *1996 ARRL Periodicals CD ROM* (order #6109) contain a complete copy of all articles from a year's worth of *QST*, the *National Contest Journal* and *QEX*, ARRL's experimenter's magazine. It is available for \$19.95 plus \$4.00 for shipping and handling. Contact the ARRL Publications Sales Department to order a copy.

Older issues of *QST* are also available: *QST View CD-ROMs* come in sets covering several years each - *QST View 1990-1994* (order #5749), *QST View 1985-1989* (order #5757), *QST View 1980-1984* (order #5765), *QSTView 1975-1979* (order #5773), *QSTView 1970-1974* (order #5781), *QSTView 1965-1969* (order #6451), *QSTView 1960-1964* (order #6443) and *QSTView 1950-1959* (order #6435). The price for each set is \$39.95. Shipping and handling for all ARRL CD ROM products is \$4.00 for the first one ordered, \$1.00 for each additional set ordered at the same time.

Additional test result reports are available for:

Manufacturer	Model	Issue
Alpha Power	91B	Sep 97
Amewritron	AL-800H	Sep 97
ICOM	IC-706	Mar 96
	IC-756	May 97
	IC-775DSP	Jan 96
	IC-821H	Mar 97
	JRC	NRD-535
Kenwood	TS-570D	Jan 97
	TS-870S	Feb96
QRO	HF-2500DX	Sep 97
Ten-Tec	Centaur	Jun 97
	Omni VI +	Nov 97
Yaesu	FT-920	Oct 97
	FT-1000MP	Apr 96

The cost is \$7.50 for ARRL Members, \$12.50 for non-Members for each report, postpaid. ARRL Members can obtain any three reports for \$20.00, postpaid.

Transmitter Output Power:


Test description: One of the first things an amateur wants to know about a transmitter is its RF output power. The ARRL Lab measures the CW output power for every band on which a transmitter can operate. The unit is tested across the entire amateur band and the worst-case number for each band is reported. The equipment is also tested on one or more bands for any mode of operation for which the transmitter is capable. Typically, the most popular band of operation for each mode is selected. Thus, on an HF transmitter, the SSB tests are done on 75 meters for lower sideband, 20 meters for upper sideband, and AM tests are done on 75 meters, FM tests are done on 10 meters, etc. This test also compares the accuracy of the unit's internal output-power metering against the ARRL Laboratory's calibrated test equipment. A two-tone audio input, at a level within the manufacturer's microphone-input specifications, is used for the SSB mode. No modulation is used in the AM and FM modes.

Many transmitters are derated from maximum output power on full-carrier AM and FM modes. In most cases, a 100-watt CW/SSB transmitter may be rated at 25 watts carrier power on AM. The radio may actually deliver 100 watts PEP in AM or FM but is not specified to deliver full power for continuous duty. In these cases, the published test-result table will list the AM or FM power as being "as specified."

In almost all cases, the linearity of a transmitter decreases as output power increases. A transmitter rated at 100 watts PEP on single sideband may actually be able to deliver more power, but as the power is increased beyond the rated RF output power, adjacent channel splatter (IMD) usually increases dramatically. If the ARRL Lab determines that a transmitter is capable of delivering its rated PEP SSB output, the test-result table lists the power as being "as specified."

Key Test Conditions: Termination: 50 ohms resistive, or as specified by the manufacturer.

Block Diagram:

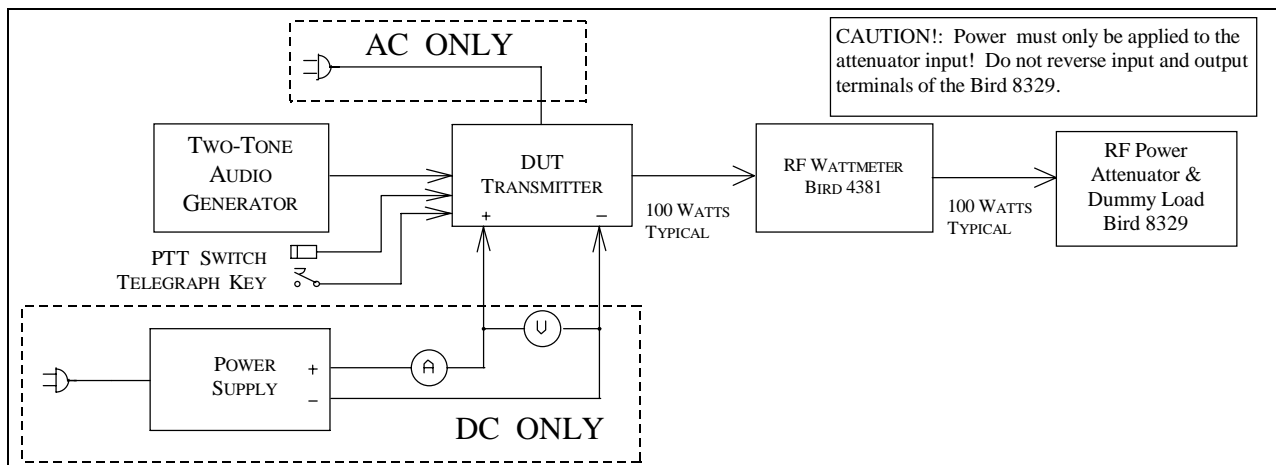

Transmitter Output Power Test Results:

Frequency Band (MHz)	Mode	Unit's Meter Minimum Power (W)	Measured Minimum Power (W)	Unit 's Meter Maximum Power (W)	Measured Maximum Power (W)	Notes (99)
1.8 MHz	CW	N/A	1.8W	N/A	99.8W	10
3.5 MHz	CW	N/A	1.8W	N/A	101.1W	
3.5 MHz	AM	N/A	1.2W	N/A	40.2W	
7 MHz	CW	N/A	1.9W	N/A	102.5W	
10.1 MHz	CW	N/A	1.9W	N/A	103.9W	
14 MHz	CW	2W	1.9W	104.3 W	104.3W	
14 MHz	USB	2W	2.1W	100 W	100W	
18 MHz	CW	N/A	1.9W	N/A	104.6W	
21 MHz	CW	N/A	1.9W	N/A	104.5W	
24 MHz	CW	N/A	1.9W	N/A	103.5W	
28 MHz	CW	N/A	1.9W	N/A	100.7W	
28 MHz	FM	N/A	1.9W	N/A	100.6W	
50 MHz	CW	2 W	1.5W	100W	98.7W	
50 MHz	FM	2 W	1.5W	100W	99.4W	
50 MHz	SSB	N/A	N/A	100W	101.9W	
50 MHz	AM	2W	1.2W	40W	41.2W	

Notes:

10. Transmit IMD generally increases significantly above rated power.

Transverter Jack Output Power Test:

Test Description: This test measures the output power from the transverter jack (if applicable). This is usually somewhere near 0 dBm. The transverter-jack power usually varies from band to band. The 28-MHz band is the most common band for transverter operation. Most transverter outputs are between -10 dBm and +10 dBm.

Test Results:

Frequency (MHz)	Output (dBm)	Notes
20 M	dBm	1
15 M	dBm	
10 M	dBm	

Notes:

1. This model does not have a transverter output jack.

Current Consumption Test: (DC-powered units only)

Test Description: Current consumption can be a important to the success of mobile and portable operation. While it is most important for QRP rigs, the ARRL Lab tests the current consumption of all equipment that can be operated from a battery or 12-14 vdc source. The equipment is tested in transmit at maximum output power. On receive, it is tested at maximum volume, with no input signal, using the receiver's broadband noise. Any display lights are turned on to maximum brightness, if applicable. This test is not performed on equipment that can be powered only from the ac mains.

Current Consumption:

Voltage (V)	Transmit Current (A)	Output Power (W)	Receive Current (A)	Lights?	Notes
13.8 V	17.9A	100W	2.28A	ON	1

Notes:

1. This test not performed for units operated from ac mains.

Transmit Frequency Range Test:

Test Description: Many transmitters can transmit outside the amateur bands, either intentionally, to accommodate MARS operation, for example, or incidentally, as the result of the design and internal software. The ARRL Lab tests the transmit frequency range inside the screen room. The purpose of the Transmit Frequency Range Test is to determine the range of frequencies, including those outside amateur bands, for which the transmitter may be used. The key test conditions are to test it at rated power, using nominal supply voltages. Frequencies are as indicated on the transmitter frequency indicator or display. Most modern synthesized transmitters are capable of operation outside the ham bands. However, spectral purity is not always legal outside the hams bands, so caution must be used. In addition, most other radio services require that transmitting equipment be type accepted for that service. In most cases, Amateur Radio equipment is not legal for use on other than amateur, MARS or CAP frequencies.

Test Results:

Frequency	Low-Frequency Limit	High-Frequency Limit	Notes
160 M	1.800.000 MHz	1.999.999 MHz	
80 M	3.400.000 MHz	4.099.999 MHz	
40 M	6.900.000 MHz	7.499.999 MHz	
30 M	9.900.000 MHz	10.499.999MHz	
20 M	13.900.000MHz	14.499.999MHz	
17 M	17.900.000MHz	18.499.999MHz	
15 M	20.900.000MHz	21.449.999MHz	
12 M	24.400.000MHz	25.099.999MHz	
10 M	28.000.00 MHz	29.999.999 MHz	
6 M	50.000.000 MHz	54.000.000 MHz	

Notes:

CW Transmit Frequency Accuracy Test:

Test Description: Most modern amateur equipment is surprisingly accurate in frequency. It is not uncommon to find equipment operating within a few Hz of the frequency indicated on the frequency display. However, some units, notably "analog" units, not using a phase-lock loop in the VFO design, can be off by a considerable amount. This test measures the output frequency. Unit is operated into a 50-ohm resistive load at nominal temperature and supply voltage. Frequency is also measured at minimum output power, low supply voltage (12 volt units only) and over the operating temperature range (mobile and portable units only). Non-portable equipment is not tested at -10C or +60C (or specified limits) in the temperature chamber.

Test Results:

Unit Frequency	Supply Voltage	Temperature	Measured Frequency Full Output Power	Notes
14.000.000MHz	13.8 V	25 C	14.000.009 MHz	1
50.000.000 MHz	13.8 V	25 C	50.000.029 MHz	

Notes:

1. Temperature specified as 25 C is nominal room temperature.

Spectral Purity Test:

Test Description: All transmitters emit some signals outside their assigned frequency or frequency range. These signals are generally known as spurious emissions or "spurs." Part 97 of the FCC rules and regulations specify the amount of spurious emissions that can be emitted by a transmitter operating in the Amateur Radio Service. The ARRL Laboratory uses a spectrum analyzer to measure the spurious emission on each band on which a transmitter can operate. The transmitter is tested across the band and the worst-case spectral purity on each band is captured from the spectrum analyzer and stored on disk. Spectral purity is reported in dBc, meaning dB relative to the transmitted carrier.

The graphs and tables indicate the relative level of any spurious emissions from the transmitter. The lower that level, expressed in dB relative to the output carrier, the better the transmitter is. So a transmitter whose spurious emissions are -60 dBc is spectrally cleaner than is one whose spurious emissions are -30 dBc. FCC Part 97 regulations governing spectral purity are contained in 97.307 of the FCC rules. Information about all amateur rules and regulations is found in the *ARRL FCC Rule Book*. Additional information about the decibel is found in the *ARRL Handbook*.

Key Test Conditions:

Unit is operated at nominal supply voltage and temperature.


Output power is adjusted to full power on each amateur band.

A second measurement is taken at minimum power to ensure that the spectral output is still legal at low power.

The level to the spectrum analyzer is -10 dBm maximum.


The resolution bandwidth of the spectrum analyzer is 10 kHz on HF, 100 kHz on VHF, MHz on UHF.

Block Diagram:

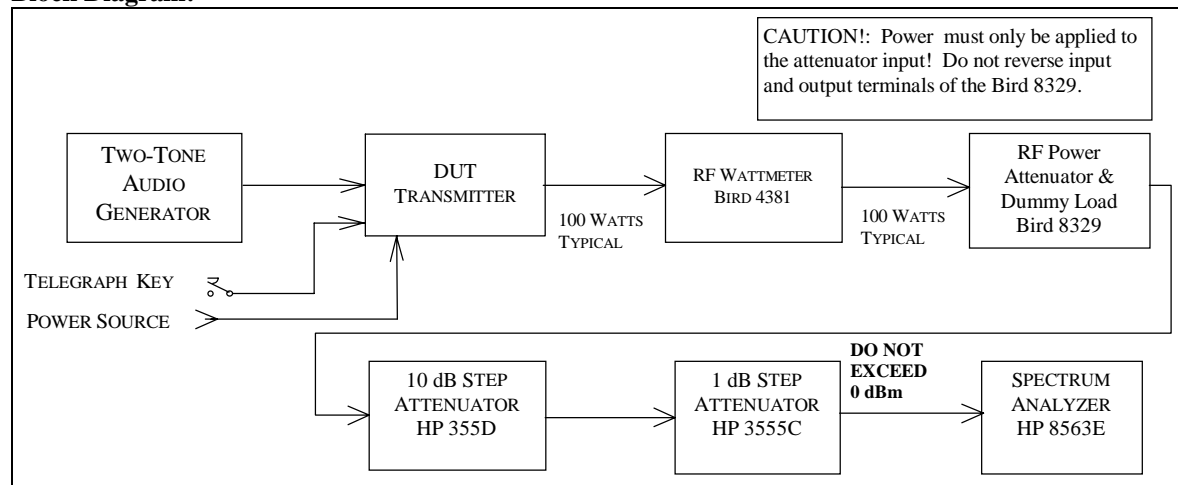


Notes:


Spectral Purity Graphs

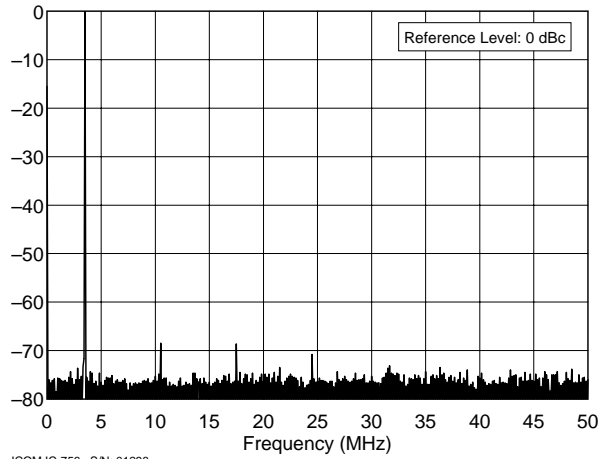


ICOM IC-756 S/N: 01238
3.5 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756S80.TXT

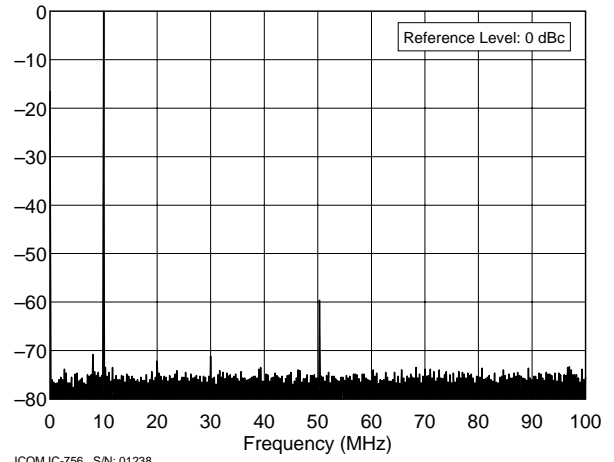


ICOM IC-756 S/N: 01238
10.1 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756S30.TXT

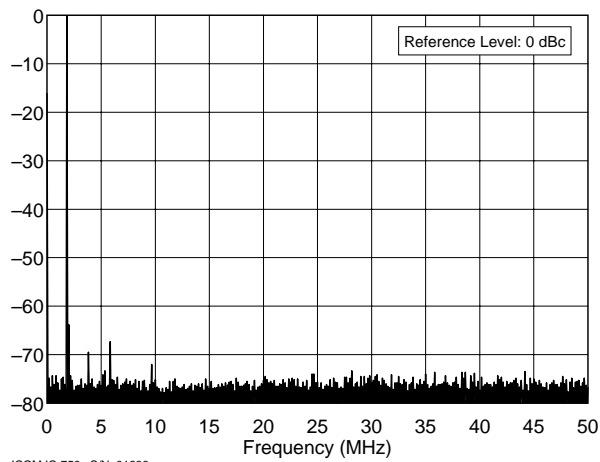


ICOM IC-756 S/N: 01238
1.8 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756SLO.TXT

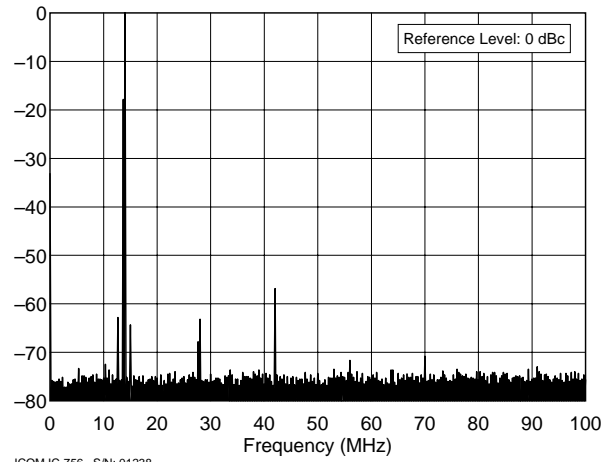


ICOM IC-756 S/N: 01238
14.0 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756S20.TXT

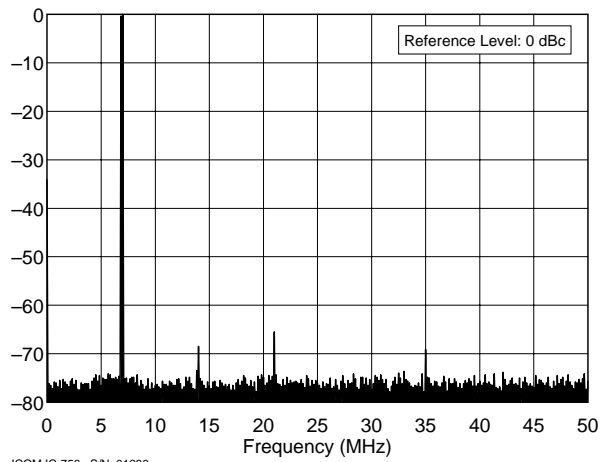


ICOM IC-756 S/N: 01238
7.0 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756S40.TXT

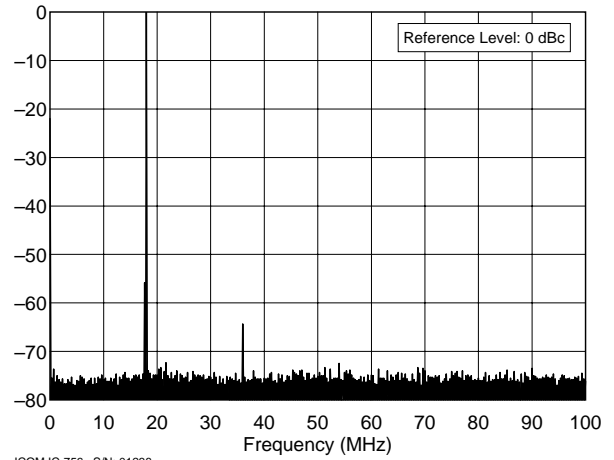


ICOM IC-756 S/N: 01238
18.1 MHz Band, Spectral Purity, 100 W
P:\TESTS\IC756\IC756S17.TXT

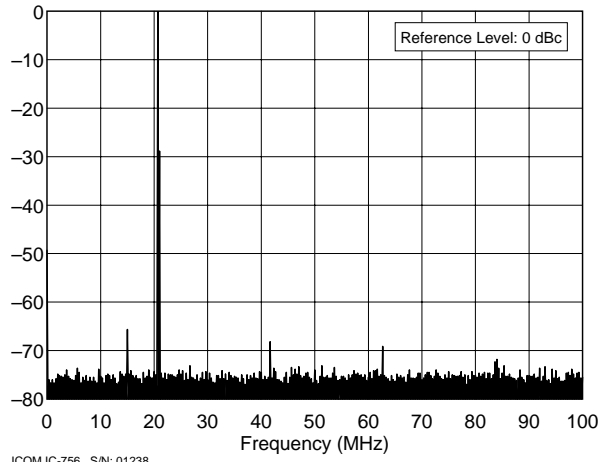


ICOM IC-756 S/N: 01238
 21.0 MHz Band, Spectral Purity, 100 W
 P:\TESTS\IC756\IC756S15.TXT

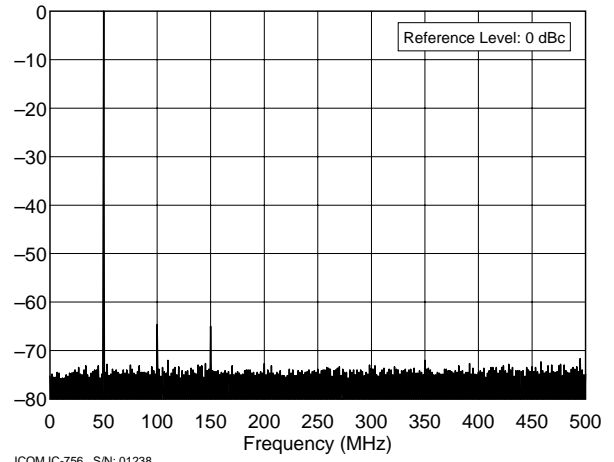

ICOM IC-756 S/N: 01238
 50.0 MHz Band, Spectral Purity, 100 W
 P:\TESTS\IC756\IC756S6M.TXT

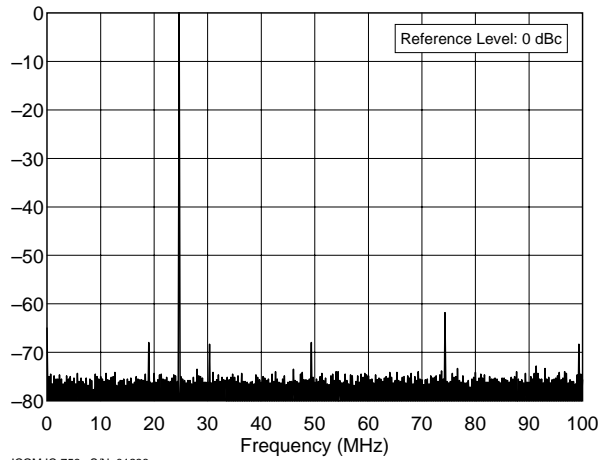

ICOM IC-756 S/N: 01238
 24.9 MHz Band, Spectral Purity, 100 W
 P:\TESTS\IC756\IC756S12.TXT

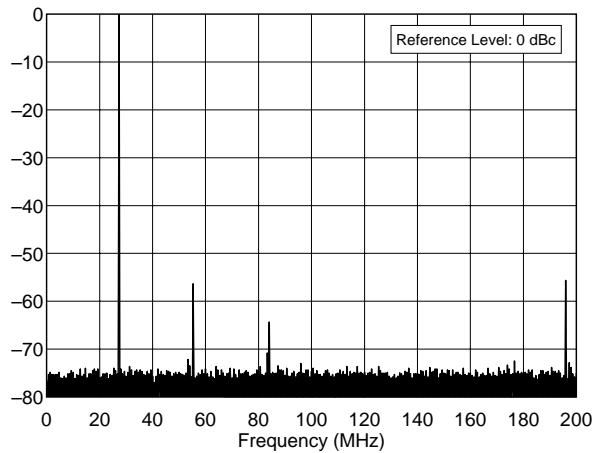

ICOM IC-756 S/N: 01238
 28.0 MHz Band, Spectral Purity, 100 W
 P:\TESTS\IC756\IC756S10.TXT


Transmit Two-Tone IMD Test:

Test Description: Investigating the sidebands from a modulated transmitter requires a narrow-band spectrum analysis. In this test, a two-tone test signal is used to modulate the transmitter. The display shows the two test tones plus some of the IMD products produced by the SSB transmitter. In the ARRL Lab, a two-tone test signal with frequencies of 700 and 1900 Hz is used to modulate the transmitter. These frequencies were selected to be within the audio passband of the typical transmitter, resulting in a meaningful display of transmitter IMD. The intermodulation products appear on the spectral plot above and below the two tones. The lower the intermodulation products, the better the transmitter. In general, it is the products that are farthest removed from the two tones (typically > 3 kHz away) that cause the most problems. These can cause splatter up and down the band from strong signals.

Key Test Conditions:

Transmitter operated at rated output power. Audio tones and drive level adjusted for best performance. Audio tones 700 and 1900 Hz. Both audio tones adjusted for equal RF output. Level to spectrum analyzer, -10 dBm nominal, -10 dBm maximum. Resolution bandwidth, 10 Hz


Block Diagram:

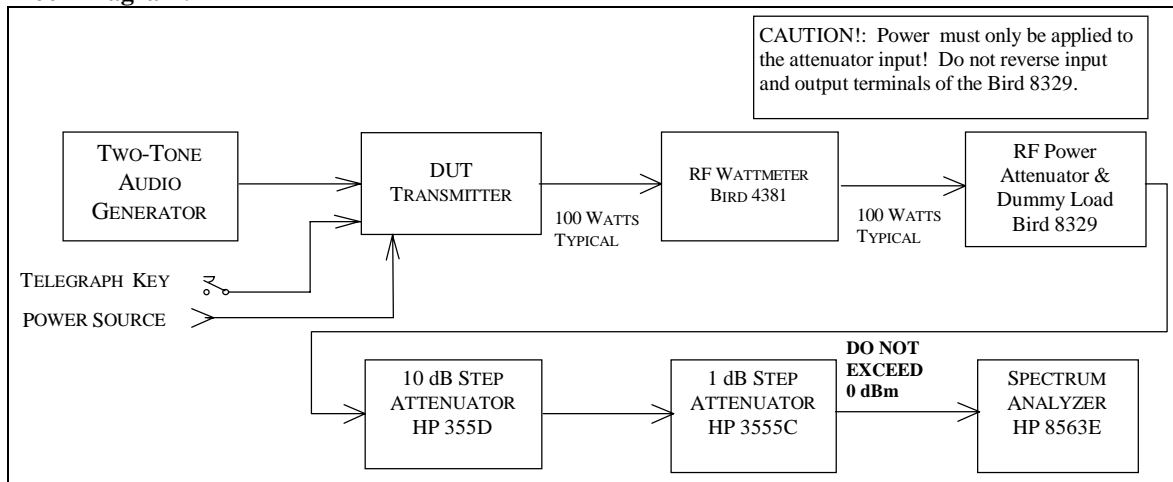


Notes:

1. The ARRL Laboratory has traditionally tested transmitter IMD performance on 80 M and 20 M only. This represented a low band, and the most popular of the higher HF bands, one band on LSB and the other on USB. However, with the addition of computer-controlled testing and the associated test automation it became economically practical to test this transmitter's IMD performance on all available bands. This information is being offered in the test-result reports and will be used in future "Product Reviews," taking more data to give us a wider selection for "worst-case" test results published in *QST*. The ARRL Lab is constantly expanding and improving its test methods. Expect to see additional changes as we more fully explore the technical performance of modern equipment.


Transmit IMD Graphs

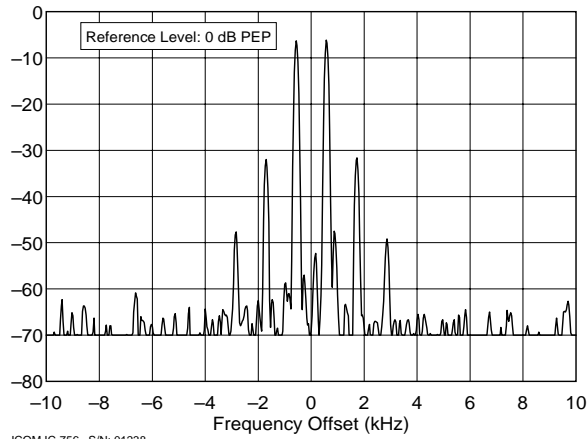


ICOM IC-756 S/N: 01238
 1.850 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756100.TXT
 Tue Mar 11 15:15:03 1997

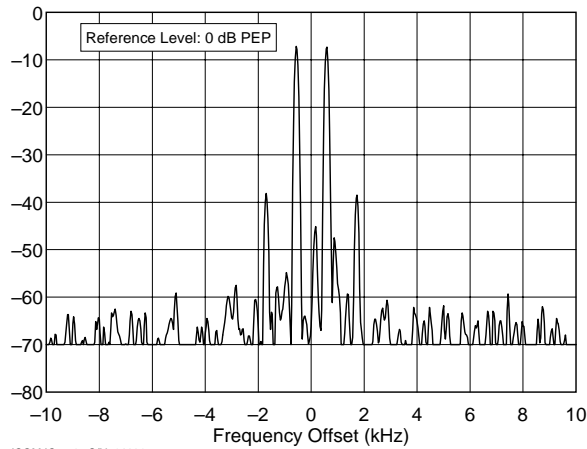


ICOM IC-756 S/N: 01238
 3.900 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756180.TXT
 Tue Mar 11 15:14:20 1997

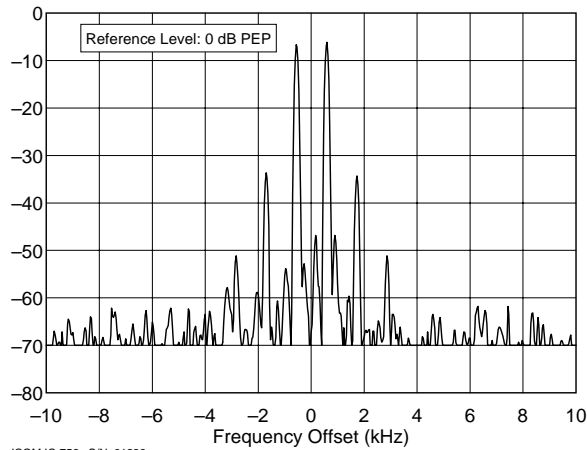


ICOM IC-756 S/N: 01238
 7.250 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756140.TXT
 Tue Mar 11 15:13:03 1997

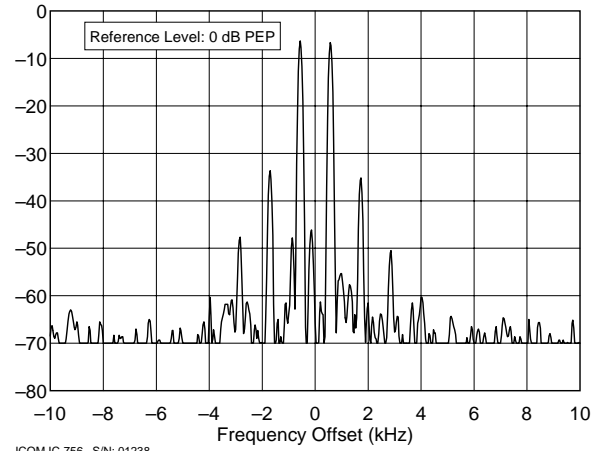


ICOM IC-756 S/N: 01238
 10.120 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756130.TXT
 Tue Mar 11 15:12:24 1997

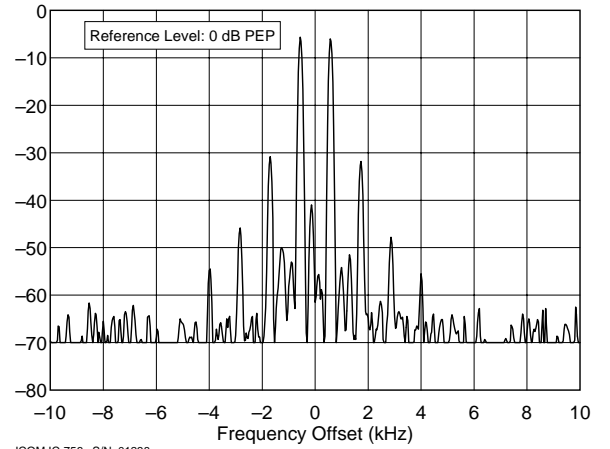


ICOM IC-756 S/N: 01238
 14.250 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756120.TXT
 Tue Mar 11 15:11:46 1997

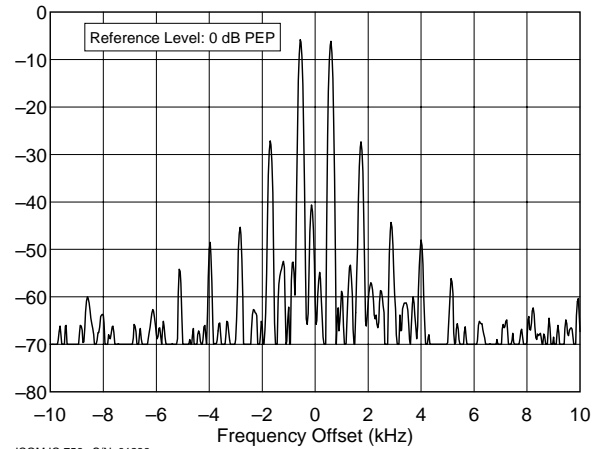


ICOM IC-756 S/N: 01238
 18.120 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756117.TXT
 Tue Mar 11 15:11:05 1997

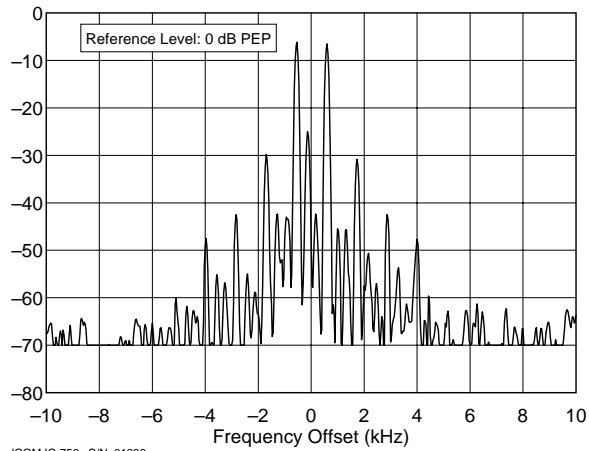


ICOM IC-756 S/N: 01238
 21.250 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756I15.TXT
 Tue Mar 11 15:10:31 1997

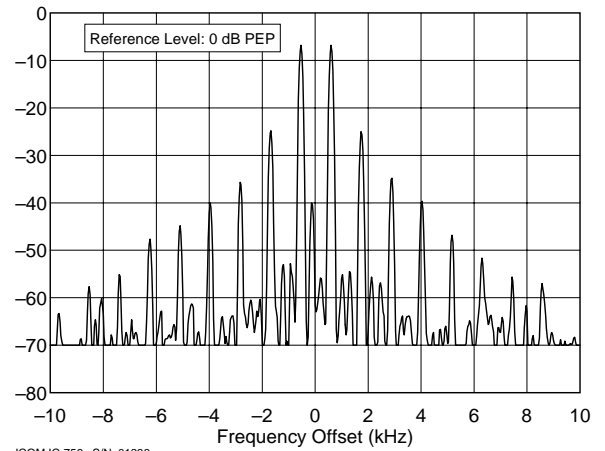


ICOM IC-756 S/N: 01238
 28.350 MHz, Transmit IMD, 92 W
 P:\TESTS\IC756\92W10.TXT
 Tue Mar 11 15:20:40 1997

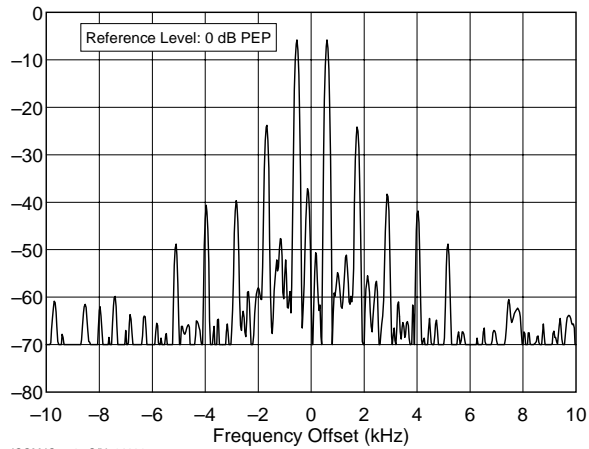

ICOM IC-756 S/N: 01238
 24.950 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756I12.TXT
 Tue Mar 11 15:06:53 1997


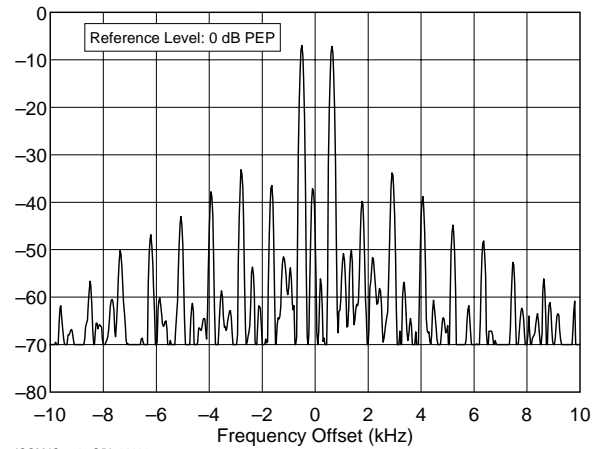


ICOM IC-756 S/N: 01238
 50.200 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756I6M.TXT
 Tue Mar 11 15:13:42 1997

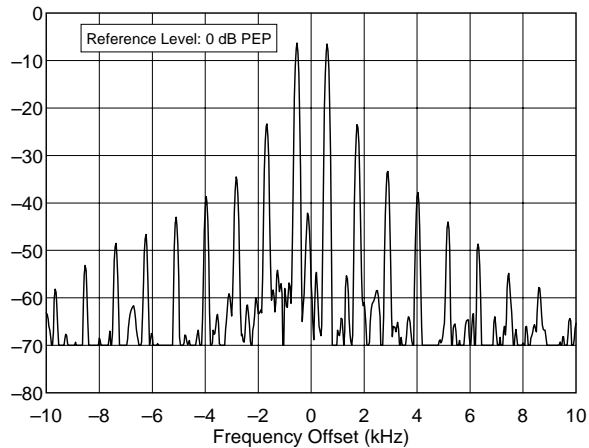

ICOM IC-756 S/N: 01238
 28.350 MHz, Transmit IMD, 100 W
 P:\TESTS\IC756\IC756I10.TXT
 Tue Mar 11 15:20:02 1997

Note: Icom sent us a factory unit for evaluation. Here are two IMD plots from that unit:

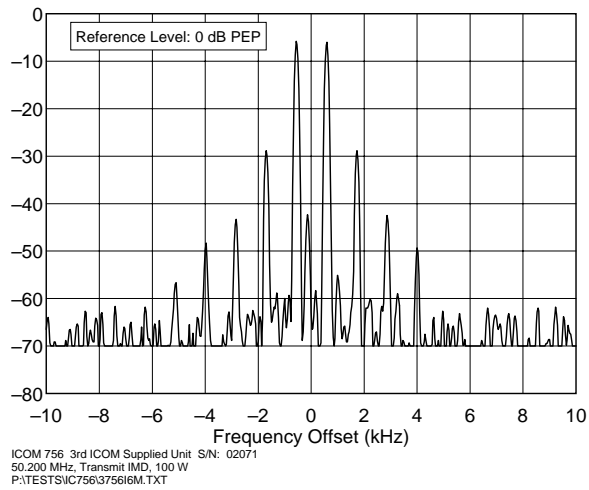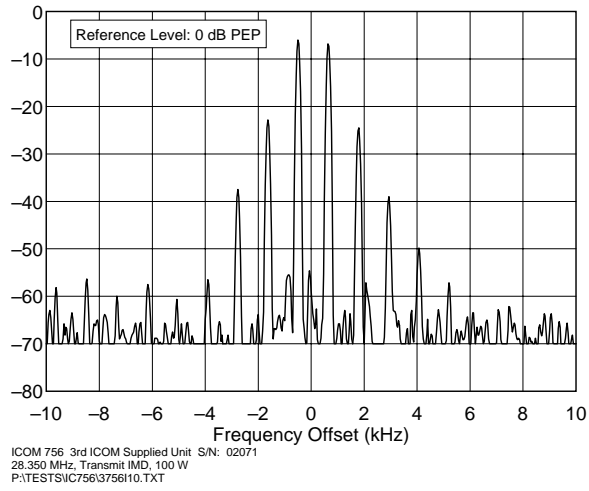

SSB Carrier and Unwanted Sideband Suppression Test:

Test Description: The purpose of the SSB Carrier and opposite-sideband Suppression test is to determine the level of carrier and unwanted sideband suppression relative to Peak Envelope Power (PEP). The transmitter output is observed on the spectrum analyzer and the unwanted components are compared to the desired sideband. The level to the spectrum analyzer is -10 dBm nominal. The measurement bandwidth is 100 Hz. The greater the amount of suppression, the better the transmitter. For example, opposite sideband suppression of 60 dB is better than suppression of 50 dB.

Test Results:

Frequency (MHz)	Carrier Suppression (dB)	Opposite Sideband Suppression (dB)	Notes
14.2 MHz USB	> 55dB PEP	> 55dB PEP	
14.2 MHz LSB	> 55dB PEP	> 55dB PEP	

Notes:

CW Keying Waveform Test:

Test Description: The purpose of the CW Keying Waveform Test is to determine the rise and fall times for the 10% to the 90% point of the device under test's RF output envelope in the CW mode. The on and off delay times from key closure to RF output are also measured. If the transmitter under test has several CW modes, (i.e. VOX, QSK) these measurements is made at rated output power for each mode. A picture of the oscilloscope screen is taken of the results with the QSK off, and in the VOX mode showing the first dit, and any other test conditions that result in a waveshape that is significantly different from the others (more than 10% difference, spikes, etc.). The first and second dits are shown in all modes.

If the risetime or falltime become too short, the transmitter will generate key clicks. Most click-free transmitters have a rise and fall time between 1 ms and 5 ms. The absolute value of the on delay and off delay are not critical, but it is important that they be approximately the same so that CW weighting will not be affected.

Some transmitters used in the VOX mode exhibit a first dit that is shorter than subsequent dits. Other transmitters can show significant shortening of all dits when used in the QSK mode. The latter will cause keying to sound choppy.

The first dit foreshortening is expressed as a "weighting" number. In perfect keying, the weighting is 50%, meaning that the carrier is ON for 50% of the time.

Key Test Conditions:

The transmitter is operated at room temperature at rated output power into a 50-ohm resistive load. The power supply voltage is nominal. Attenuators are adjusted to obtain 3 volts RMS to the oscilloscope.

Test Results:

Frequency (MHz)	Mode	First Dit Risetime (ms)	First Dit Falltime (ms)	Following Dits Risetime (ms)	Following Dits Falltime (ms)	First Dit On Delay (ms)	First Dit Off Delay (ms)	Following Dits On Delay (ms)	Following Dits Off Delay (ms)	Weight %	First Dit Weight %
14.02	QSK	1.6ms	2.4ms	2.0ms	2.6ms	*ms	*ms	13ms	5ms	35%	***
14.02	VOX	1.6ms	2.4ms	1.8ms	2.6ms	*ms	*ms	7ms	5ms	47.5%	***

Notes:

* The nature of the waveform on the first dit made this number a bit uncertain.

Captions (Figures on next pages): All Figures are 10 ms/division., unless otherwise noted.

Figure 1. This shows the first and second dits in the VOX mode.

Figure 2. This shows the subsequent dits in the VOX mode.

CW Keying Waveforms:

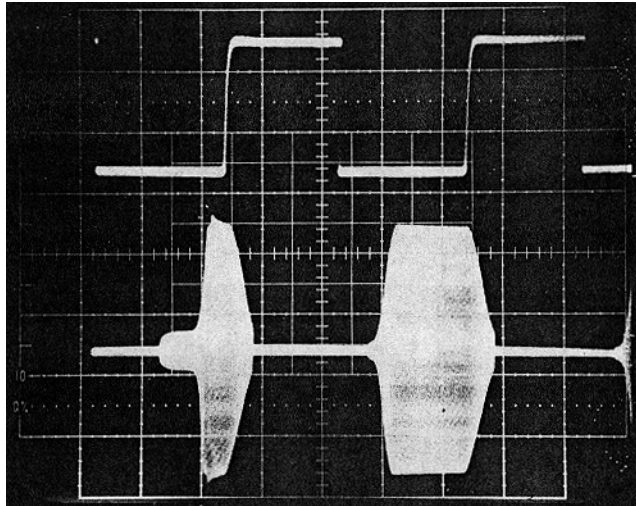


Figure 1
CW keying - VOX mode

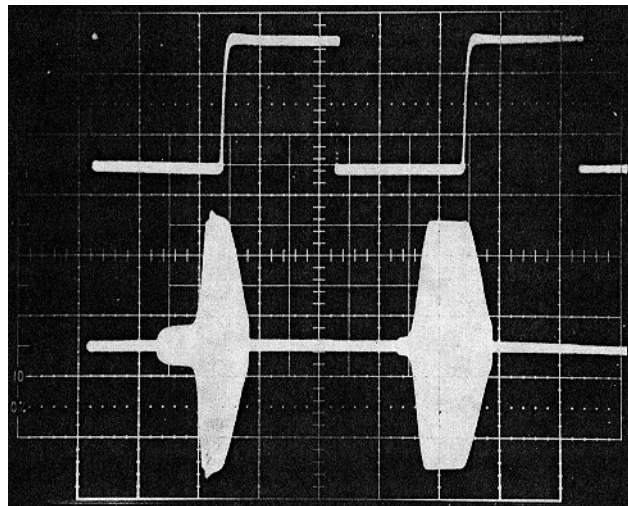


Figure 2
CW keying - QSK mode

CW Keying Waveforms:

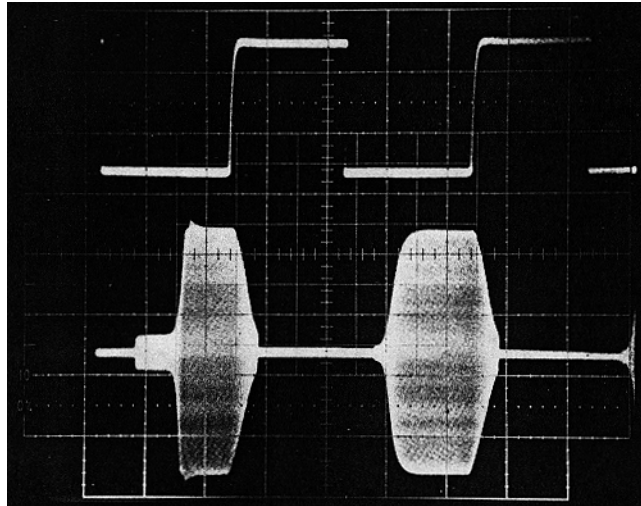


Figure 3
CW keying - MOX mode

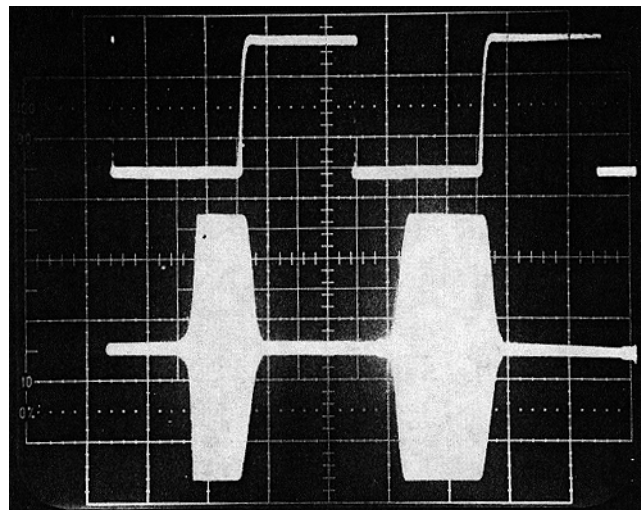


Figure 4
ICOM-modified unit
CW keying - VOX mode

CW Keying Waveforms:

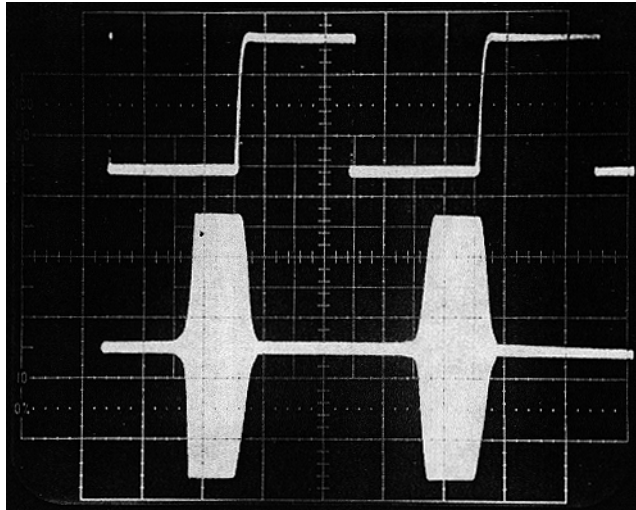


Figure 5
ICOM-modified unit
CW keying - QSK mode



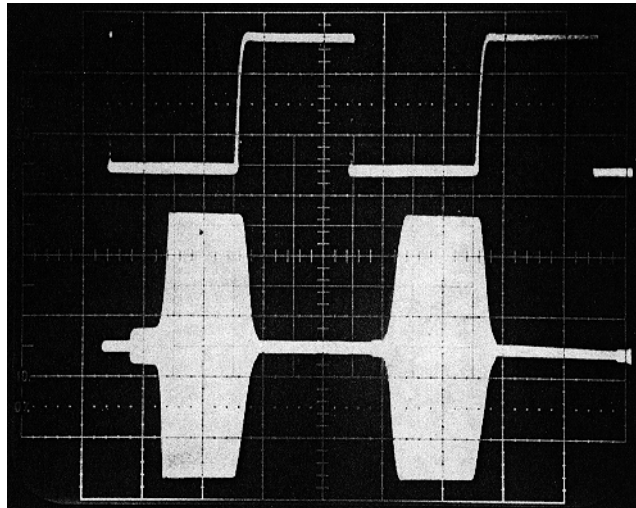


Figure 6
ICOM-modified unit
CW keying - MOX mode


The Product Review unit exhibited some rather strong key clicks. The ARRL Lab measured the keying sidebands in a 300 Hz measurement bandwidth, to simulate the clicks that would be heard in a typical 500-Hz receiver. The following graphs are from the original unit, followed by graphs of the measured keying sidebands of the ICOM-modified unit, plus a few other current models we had laying about.

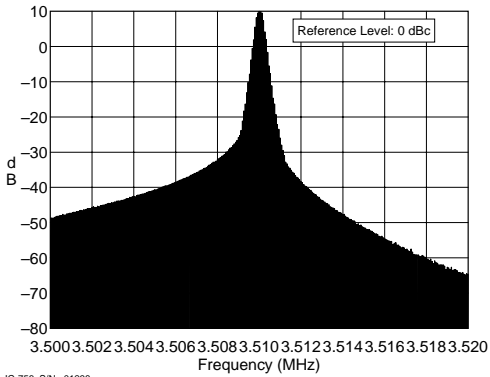


IC-756 S/N: 01238
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 300 Hz

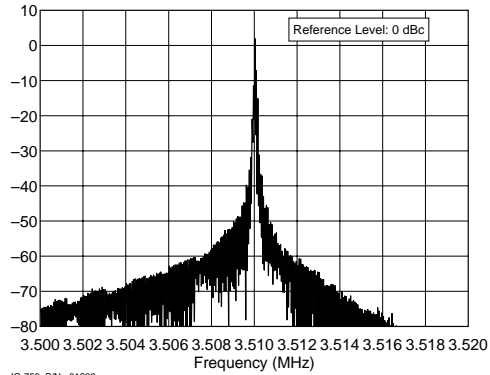


IC-756 S/N: 01238
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 10 Hz

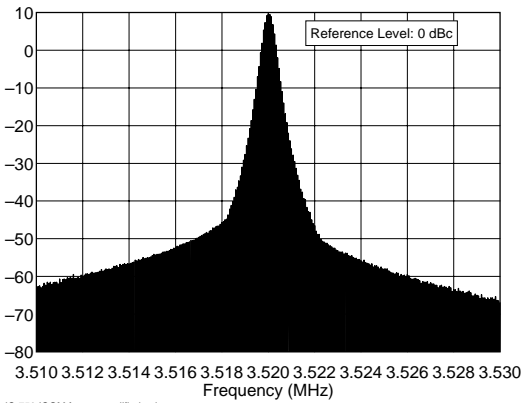


IC-756 ICOM factory modified unit
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 300 Hz

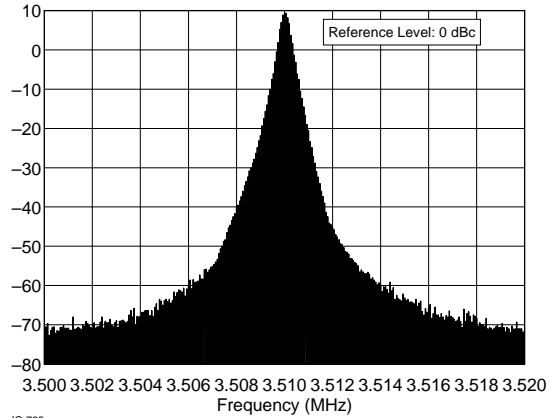

IC-765
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 300 Hz

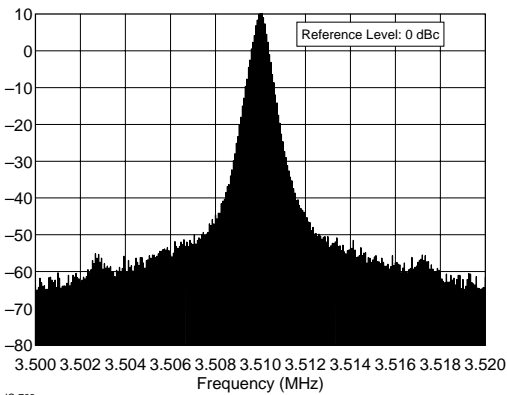

IC-706
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 300 Hz

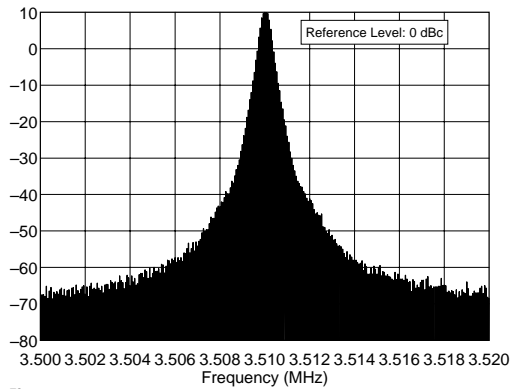

TS-570
3.5 MHz Band, Keying sidebands, 100 W
VOX mode - semi-breakin
CW keying = 60 wpm
Test resolution BW = 300 Hz

Transmit Keyer Speed Test:

Test Description: This test measures the speed of the internal keyer on transmitters so equipped. The keyer is tested at minimum, maximum speeds and the time from dit to dit is measured using an oscilloscope and used to calculate the speed using the "Paris" method calculation. (In the Paris method, the word "Paris" is used as the standard word to calculate words per minute.)

Test Results:

Min WPM	Max WPM	Mid WPM	Notes
6.1 WPM	47.7 WPM	27.7 WPM	

Notes:

Transmit/Receive Turnaround Test:

Test Description: The purpose of the Transmit/Receive turnaround test is to measure the delay required to switch from the transmit to the receive mode of a transceiver.

Test Results:

Frequency	Conditions	T/R Delay AGC Fast (ms)	T/R Delay AGC Slow (ms)	Notes
14.2 MHz	SSB	28 ms	32ms	1
14.2 MHz	AFSK	26 ms	--	

Notes:

1. T/R delay less than or equal to 35 ms is suitable for use on AMTOR.
-- = Not measured

Transmit Delay Test

Test Description: The purpose of the Transmit Delay test is to measure the time between PTT closure and 50% RF output. It is measured on SSB, modulated with a single tone and on FM, unmodulated.

Test Results:

Frequency (MHz)	Mode	On delay	Off delay	Notes
14.2 MHz	SSB	14ms	6ms	
14.2 MHz	FM	13ms	3ms	
50.2 MHz	SSB	14ms	5.9ms	
50.2 MHz	FM	11ms	2.2ms	

Notes:

Transmit Composite Noise Test:

Test Description: The purpose of the Composite-Noise Test is to observe and measure the phase and amplitude noise, as well as any spurious signals generated by the device under test transmitter. Since phase noise is the primary noise component in any well-designed transmitter, it can be assumed, therefore, that almost all the noise observed during this test is phase noise. This measurement is accomplished by converting the output of the transmitter down to a frequency about 10 or 20 Hz above baseband. A mixer and a signal generator used as a local oscillator are used to perform this conversion. Filters remove the 0 Hz component as well as the unwanted heterodyne components. The remaining noise and spurious signals are then observed on the spectrum analyzer. The lower the noise as seen on the plot, the better the transmitter.

Key Test Conditions:


Transmitter operated at rated output power into a 50-ohm resistive load.

Transmitter operated at room temperature.

Frequencies from 2 to 22 kHz from the carrier are measured.




Ten sweeps are averaged on the spectrum analyzer to reduce noise.

Block Diagram:

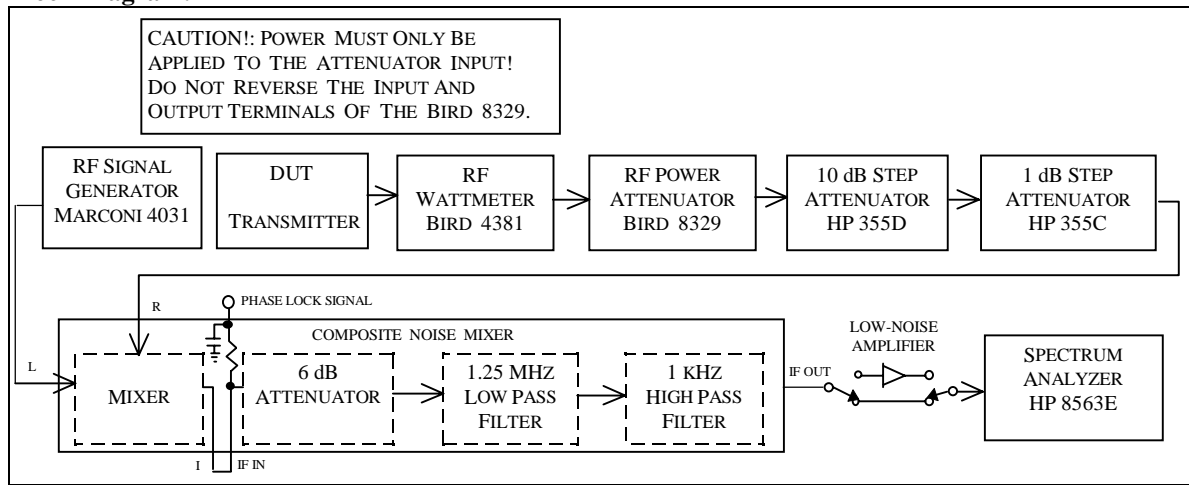

Notes:

Transmit Composite Noise Graphs (20 M is top figure; 80 M is bottom figure):

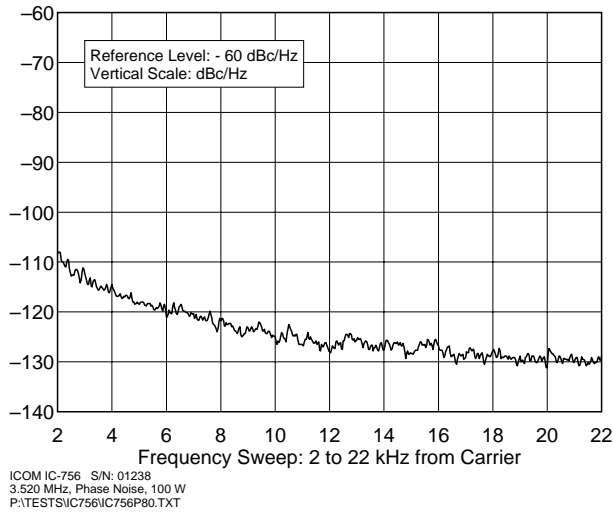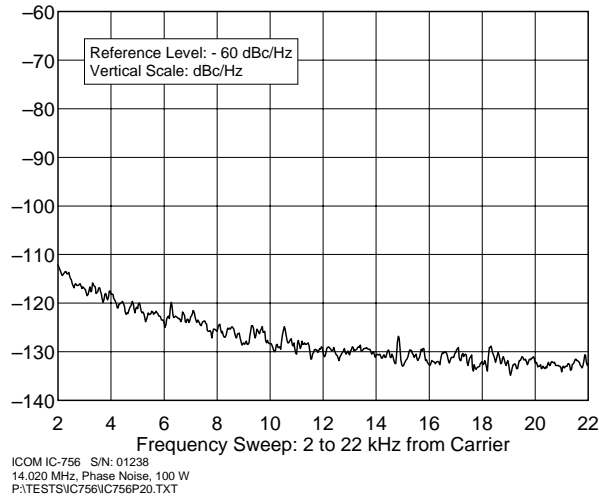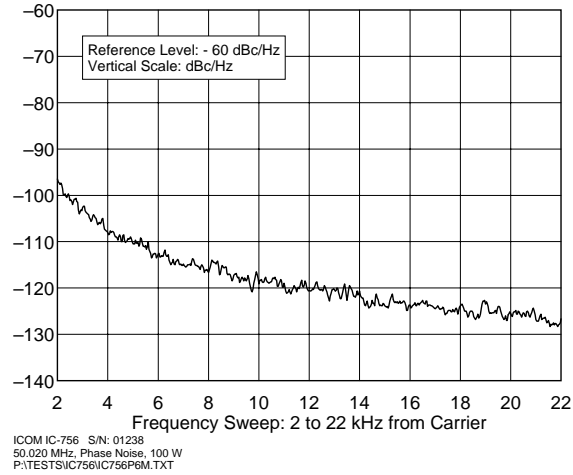


Receiver Noise Floor (Minimum Discernible Signal) Test:

Test Description: The noise floor of a receiver is the level of input signal that gives a desired audio output level that is equal to the noise output level. This is sometimes called "minimum discernible signal " (MDS), although a skilled operator can copy a signal at considerably less than the noise floor. Most modern receivers have a noise floor within a few dB of "perfect." A perfect receiver would hear only the noise of a resistor at room temperature. However, especially for HF receiving systems, the system noise is rarely determined by the receiver. In most cases, external noise is many dB higher than the receiver's internal noise. In this case, it is the external factors that determine the system noise performance. Making the receiver more sensitive will only allow it to hear more noise. It will also be more prone to overload. In many cases, especially in the lower HF bands, receiver performance can be improved by sacrificing unneeded sensitivity by placing an attenuator in front of the receiver. The more negative the sensitivity number expressed in dBm, or the smaller the number expressed in voltage, the better the receiver.

Key Test Conditions:

50-ohm source impedance for generators.; Receiver audio output to be terminated with specified impedance.
Receiver is tested using 500 Hz bandwidth, or closest available bandwidth to 500 Hz.

Block Diagram:

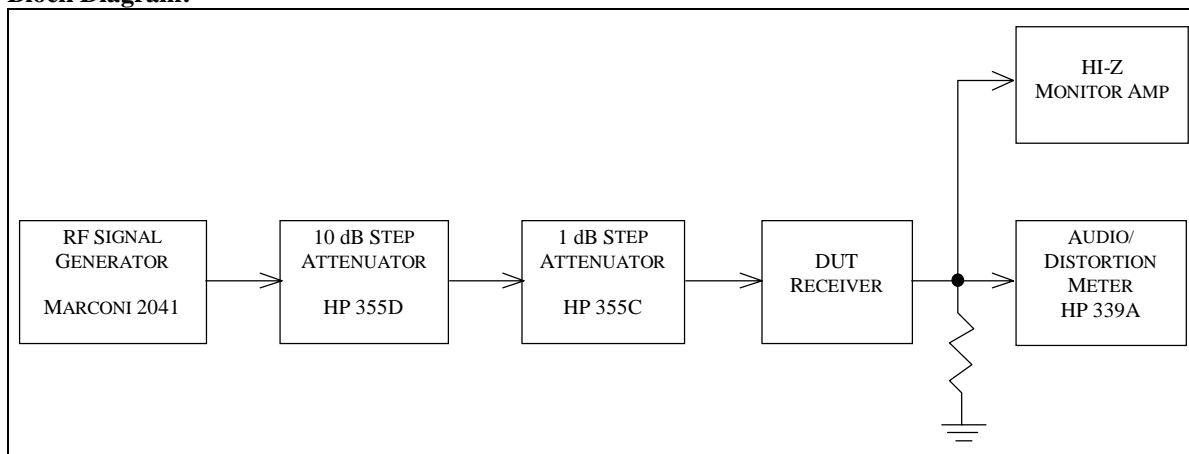

Noise Floor:

Frequency	Preamp OFF MDS (dBm)	Preamp 1 ON MDS (dBm)	Preamp 2 ON (MDS) dBm	Notes
180 kHz	-114.0 dBm	N/A	N/A	1
500 kHz	-122.3 dBm	N/A	N/A	
1.02 MHz	-124.7 dBm	-124.7 dBm	N/A	
1.82 MHz	-131.5 dBm	-138.3 dBm	N/A	
3.52 MHz	-134.9 dBm	-139.3 dBm	N/A	
7.02 MHz	-134.2 dBm	-139.5 dBm	N/A	
10.12 MHz	-134.8 dBm	-140.6 dBm	N/A	
14.02 MHz	-134.6 dBm	-139.4 dBm	N/A	
18.1 MHz	-132.8 dBm	-139.3 dBm	-141.6 dBm	
21.02 MHz	-132.8 dBm	-140.6 dBm	-141.6 dBm	
24.91 MHz	-130.8 dBm	-140.2 dBm	-141.6 dBm	
28.02 MHz	-132.1 dBm	-140.2 dBm	-142.7 dBm	
50.02 MHz	-131.3 dBm	-138.0 dBm	-141.4 dBm	

Notes:

N/A means not applicable or not measured. Preamp 2 is specified for 24-54 MHz.

1. For all measurements, the IF filter bandwidth was set for 500 Hz.

Receive Frequency Range:

Test Description: This test measures the tuning range of the receiver. The range expressed is the range over which the receiver can be tuned. Most receivers exhibit some degradation of sensitivity near the limits of their tuning range. In cases where this degradation renders the receiver unusable, we report both the actual and useful tuning range.

Test Results:

Minimum Frequency (MHz)	Minimum Frequency MDS (dBm)	Maximum Frequency (MHz)	Maximum Frequency MDS (dBm)	Notes
0.03 MHz	- 78.6 dBm	59.999 MHz	-129.0 dBm	1, 2

Notes:

1. Minimum frequency measurement made with preamp off.
2. The maximum frequency measurement was made with the preamp on.

AM Sensitivity Test:

Test Description: The purpose of the AM receive Sensitivity Test is to determine the level of an AM signal, 30% modulated at 1 kHz, that results in a tone 10 dB above the noise level (MDS) of the receiver. Two frequencies, 1.020 MHz and 3.800 MHz are used for this test. The more negative the number, expressed in dBm, or the smaller the number expressed in voltage, the better the sensitivity.

Test Results:

Frequency (MHz)	Preamplifier	Sensitivity (dBm)	Sensitivity (uV)	Notes
1.02 MHz	OFF	-97.3 dBm	3.05 uV	1
1.02 MHz	ON	-97.3 dBm	3.05 uV	
3.8 MHz	OFF	-106.4 dBm	1.07 uV	
3.8 MHz	ON	-110.7 dBm	0.652 uV	
28.5 MHz	OFF	-105.7 dBm	1.16 uV	
28.5 MHz	ON 1	-114.3 dBm	0.431 uV	
28.5 MHz	ON 2	-115.9 dBm	0.359 uV	
50.2 MHz	OFF	-103.9 dBm	1.43 uV	
50.2 MHz	ON 1	-111.2 dBm	0.616 uV	
50.2 MHz	ON 2	-114.5 dBm	0.421 uV	

Notes:

1. 500 Hz nominal receiver bandwidth used for all tests

FM SINAD and Quieting Test:

Test Description: The purpose of the FM SINAD and Quieting Test is to determine the following at a test frequency of 29.000 MHz:

1) The 12 dB SINAD value.

SINAD is an acronym for "Signal plus Noise And Distortion" and is a measure of signal quality. The exact expression for SINAD is the following:

$$\text{SINAD} = \frac{\text{Signal} + \text{Noise} + \text{Distortion}}{\text{Noise} + \text{Distortion}} \quad (\text{expressed in dB})$$

If we consider distortion to be merely another form of noise, (distortion, like noise, is something unwanted added to the signal), and a practical circuit in which the signal is much greater than the noise, the SINAD equation can be approximated by the signal to noise ratio:

$$\text{SINAD} = \frac{\text{Signal}}{\text{Noise}} \quad (\text{expressed in dB})$$

For the 25% level of distortion used in this test, the SINAD value can be calculated as follows:

$$\text{SINAD} = 20 \log (1/25\%) = 20 \log 4 = 12 \text{ dB}$$

2) The level of unmodulated input signal that produces 10 dB of quieting if specified by the manufacturer.

3) The level of unmodulated input signal that produces 20 dB of quieting if specified by the manufacturer.

The more negative the number, expressed in dBm, or the smaller the number, expressed as voltage, the better the sensitivity.

Test Results:

Frequency (MHz)	Preamplifier	Bandwidth	Sensitivity (dBm)	Sensitivity (uV)	Notes
29.0 MHz	OFF	NAR	-111.7 dBm	0.582 uV	1
29.0 MHz	ON 1	NAR	-119.4 dBm	0.240 uV	
29.0 MHz	ON 2	NAR	-121.5 dBm	0.188 uV	
52.0 MHz	OFF	NAR	-109.3 dBm	0.767 uV	
52.0 MHz	ON 1	NAR	-117.4 dBm	0.302 uV	
52.0 MHz	ON 2	NAR	-120.1 dBm	0.221 uV	

Notes:

1. Level for 12 dB SINAD. The FM quieting test is performed only if needed to verify a manufacturer's specification.


Blocking Dynamic Range Test:

Test Description: Dynamic range is a measurement of a receiver's ability to function well on one frequency in the presence of one or more unwanted signals on other frequency. It is essentially a measurement of the difference between a receiver's noise floor and the loudest off-channel signal that can be accommodated without measurable degradation of the receiver's response to a relatively weak signal to which it is tuned. This difference is usually expressed in dB. Thus, a receiver with a dynamic range of 100 dB would be able to tolerate an off-channel signal 100 dB stronger than the receiver's noise floor.

In the case of blocking dynamic range, the degradation criterion is receiver desense. Blocking dynamic range (BDR) is the difference, in dB, between the noise floor and a off-channel signal that causes 1 dB of gain compression in the receiver. It indicates the signal level, above the noise floor, that begins to cause desensitization. BDR is calculated by subtracting the noise floor from the level of undesired signal that produces a 1-dB decrease in a weak desired signal. It is expressed in dB. The greater the dynamic range, expressed in dB, the better the receiver performance. It is usual for the dynamic range to vary with frequency spacing.

Key Test Conditions: If possible, AGC is normally turned off; the receiver is operated in its linear region. Desired signal set to 10 dB below the 1-dB compression point, or 20 dB above the noise floor in receivers whose AGC cannot be disabled. The receiver bandwidth is set as close as possible to 500 Hz.

Block Diagram

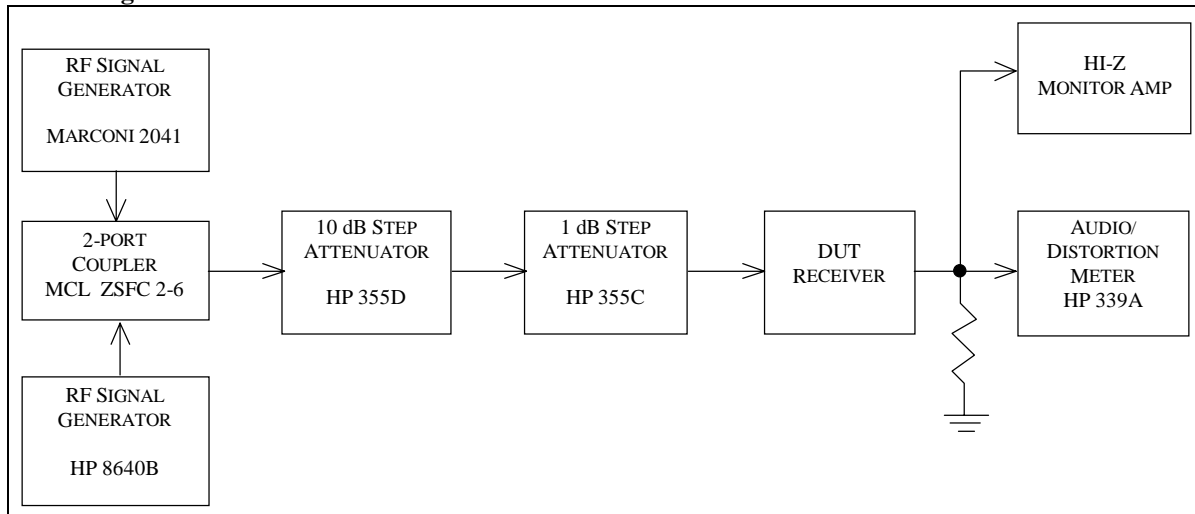

Test Result Summary:

Frequency (MHz)	Preamp	Spacing	BDR (dB)	Notes
1.020 MHz	OFF	20 kHz	134.7 dB*	1
3.52 MHz	OFF	20 kHz	136.9 dB*	
3.52 MHz	ON	20 kHz	132.3 dB	
3.52 MHz	ON	50 kHz	134.8 dB	
7.02 MHz	ON	50 kHz	137.5 dB*	
14.02 MHz	ON	20 kHz	132.1 dB*	
14.02 MHz	OFF	20 kHz	128.4 dB*	
14.02 MHz	ON	100 kHz	139.4 dB*	
21.02 MHz	ON	50 kHz	137.6 dB*	
28.02 MHz	OFF	20 kHz	136.6 dB*	
28.02 MHz	ON 1	20 kHz	133.2 dB*	
28.02 MHz	ON 2	20 kHz	128.4 dB	
28.02 MHz	ON 1	50 kHz	134.7 dB*	
50.02 MHz	OFF	20 kHz	125.3 dB*	
50.02 MHz	ON 2	20 kHz	117.5 dB*	
50.02 MHz	ON 2	50 kHz	131.4 dB*	

Notes:

- For all measurements, the IF filter bandwidth was set for 500 Hz.
- * Indicates that measurement was noise limited at values shown

Two-Tone 3rd-Order Dynamic Range Test:


Test Description: Intermodulation distortion dynamic range (IMD DR) measures the impact of two-tone IMD on a receiver. IMD is the production of spurious responses resulting from the mixing of desired and undesired signals in a receiver. IMD occurs in any receiver when signals of sufficient magnitude are present. IMD DR is the difference, in dB, between the noise floor and the strength of two equal off-channel signals that produce a third-order product equal to the noise floor. In the case of two-tone, third-order dynamic range, the degradation criterion is a receiver spurious response. If the receiver generates a third-order response equal to the receiver's noise floor to two off-channel signals, the difference between the noise floor and the level of one of the off-channel signals is the blocking dynamic range. This test determines the range of signals that can be tolerated by the device under test while producing essentially no undesired spurious responses. To perform the 3rd Order test, two signals of equal amplitude and spaced 20 kHz apart, are injected into the input of the receiver. If we call these frequencies f_1 and f_2 , the third-order products will appear at frequencies of $(2f_1-f_2)$ and $(2f_2-f_1)$. Automated test software also performs a swept test on the 20-meter band.

The greater the dynamic range, expressed in dB, or the higher the intercept point, the better the performance.

Key Test Conditions:

If possible, AGC is turned off; the receiver is operated in the linear region. Sufficient attenuation and isolation must exist between the two signal generators. The two-port coupler must be terminated in a 20-dB return loss load. The receiver is set as close as possible to 500 Hz bandwidth.

Block Diagram:

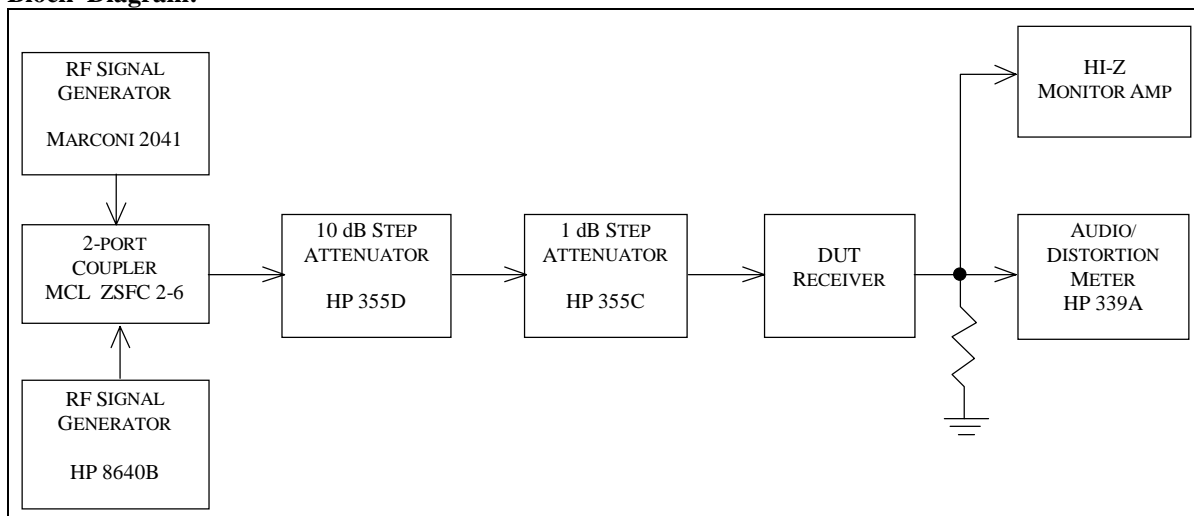

Two-Tone Receiver IMD Dynamic Range Test Result Summary:

Frequency (MHz)	Spacing	Preamp1 ON IMD DR (dB)	Preamp 2 ON IMD DR (dB)	Preamp OFF IMD DR (dB)	Notes
1.020 MHz	20 kHz	94.7 dB	N/A	94.7 dB	
3.52 MHz	20 kHz	93.3 dB	N/A	--	
3.52 MHz	50 kHz	100.3 dB	N/A	100.9 dB	
7.02 MHz	50 kHz	100.5 dB	N/A	101.2 dB	
14.02 MHz	20 kHz	93.4 dB	N/A	96.6 dB	
14.02 MHz	50 kHz	100.4 dB	N/A	103.6 dB	
14.02 MHz	100 kHz	100.4 dB	N/A	105.6 dB	
21.02 MHz	50 kHz	102.6 dB	N/A	103.8 dB	
28.02 MHz	20 kHz	92.2 dB	89.4 dB	93.1 dB	
28.02 MHz	50 kHz	N/A	89.5 dB	92.3 dB	

Notes:

- For all measurements, the IF filter bandwidth was set for 500 Hz.
- * Indicates that the measurement was noise limited at values shown.

N/A = Not applicable. Preamp 2 is specified to operate from 24-54 MHz.
-- = not measured.

Dynamic Range Graphs:

The following page shows one of the highlights of ARRL test result reports -- swept graphs on receiver two-tone, third-order IMD dynamic range and blocking dynamic range. These graphs are taken using National Instruments LabWindows CVI automated test software, with a custom program written by the ARRL Laboratory.

Dynamic range measures the difference between a receiver's noise floor and the receiver's degradation in the presence of strong signals. In some cases, the receiver's noise performance causes receiver degradation before blocking or a spurious response is seen. In either case, if the noise floor is degraded by 1 dB due to the presence of receiver noise during the test, the dynamic range is said to be noise limited by the level of signal that caused the receiver noise response. A noise-limited condition is indicated in the *QST* "Product Review" test-result tables. On the graphs on the following page(s), noise limited measurements are indicated with a small circle drawn on the data point on the graph.



Being "noise limited" is not necessarily a bad thing. A receiver noise limited at a high level is better than a receiver whose dynamic range is lower than the noise-limited level. In essence, a receiver that is noise limited has a dynamic range that is better than its local-oscillator noise. Most of the best receivers are noise limited at rather high levels.

The ARRL Laboratory has traditionally used off-channel signals spaced 20 kHz from the desired signal. This does allow easy comparisons between different receivers. There is nothing magical about the 20-kHz spacing, however. In nearly all receivers, the dynamic range varies with signal spacing, due to the specific design of the receiver. Most receivers have filter combinations that do some coarse filtering at RF and in the first IF, with additional filtering taking place in later IF or AF stages. As the signals get "inside" different filters in the receiver, the dynamic range decreases as the attenuation of the filter is no longer applied to the signal. Interestingly, the different filter shapes can sometimes be seen in the graphs of dynamic range of different receivers. In the case of the ARRL graphs, one can often see that the 20-kHz spacing falls on the slope of the curve. Many manufacturers specify dynamic range at 50 or 100 kHz.

The computer is not as skilled (yet) at interpreting noisy readings as a good test engineer, so in some cases there are a few dB difference between the computer-generated data and those in the "Product Review" tables. Our test engineer takes those numbers manually, carefully measuring levels and interpreting noise and other phenomena that can effect the test data. (We are still taking the two-tone IMD data manually.)

The graphs that follow show swept blocking and two-tone dynamic range. In the blocking test for an HF unit, the receiver is tuned to a signal on 14.020 MHz, the center of the graph. The X axis is the frequency (MHz) of the undesired, off-channel signal. In the two-tone test for an HF unit, the receiver is tuned to a signal on 14.020 MHz, the center of the graph. The X axis is the frequency of the closer of the two tones that are creating intermodulation. For VHF receivers, or single-band HF receivers, a frequency that is 20 kHz higher than the lower band edge, or 20 kHz from the "traditional" start of the weak-signal portion of the band, is selected.

Dynamic-Range Graphs:

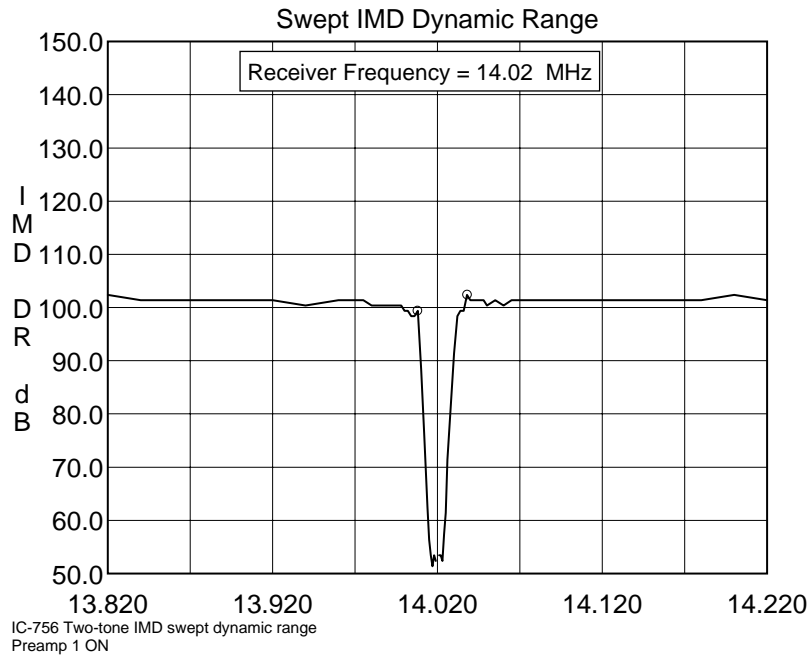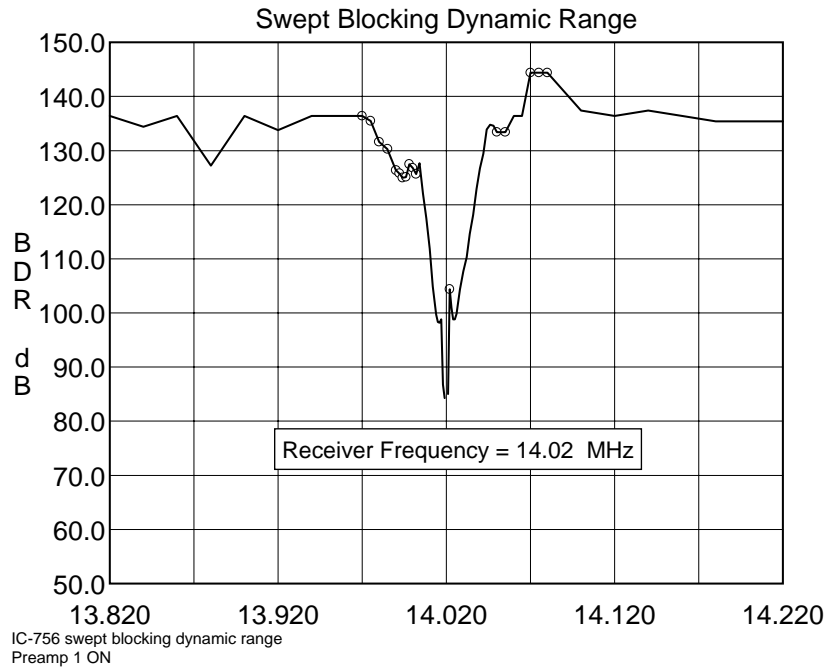

Second-Order IMD Test:

Test Description: This test measures the amount of 2nd-order mixing that takes place in the receiver. Signals at 6.000 and 8.020 MHz are presented to the receiver and the resultant output at 14.020 MHz is measured.

Test Results:

Frequency (MHz)	Preamplifier	Mode	Dynamic Range (dB)	IP2 dBm	Notes
14.02 MHz	OFF	CW	100.6 dB	66.6 dBm	
14.02 MHz	ON	CW	103.4 dB	67.4 dBm	

Notes:

In-Band Receiver IMD Test:


Test Description: This test measures the intermodulation that occurs between two signals that are simultaneously present in the passband of a receiver. Two signals, at levels of 50 uV (nominally S9), spaced 100 Hz are used. The receiver AGC is set to FAST. The receiver is tuned so the two signals appear at 900 Hz and 1100 Hz in the receiver audio. The output of the receiver is viewed on a spectrum analyzer and the 3rd- and 5th order products are measured directly from the screen. The smaller the products as seen on the graph, the better the receiver. Generally, products that are less than 30 dB below the desired tones will not be cause objectionable receiver intermodulation distortion.

Key Test Conditions:

S9 or S9 + 40 dB signals


Receiver set to SSB normal mode, nominal 2 - 3 kHz bandwidth

Block Diagram:

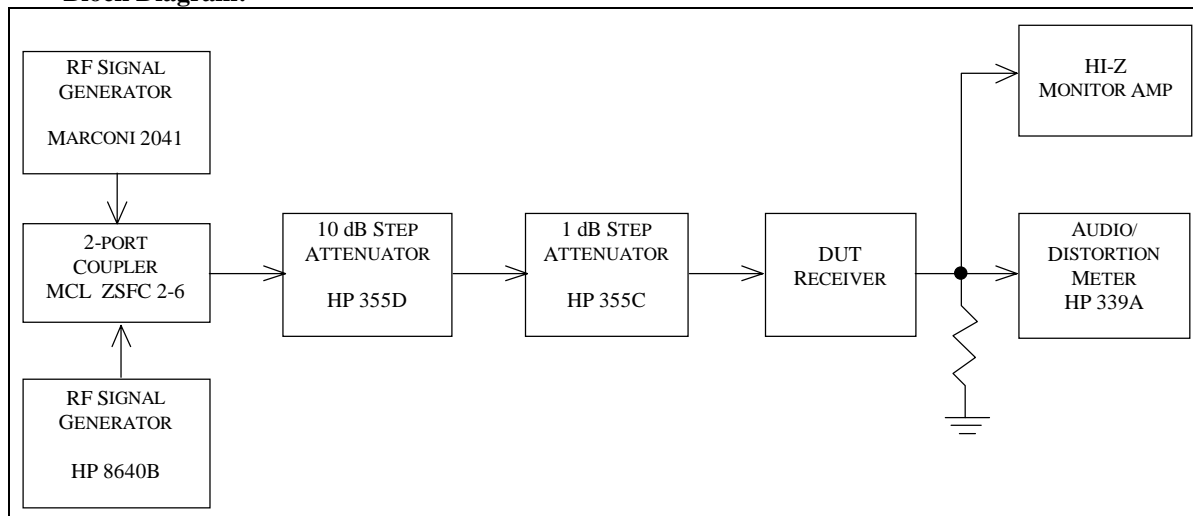


Notes:


In-Band Receiver IMD Graphs:

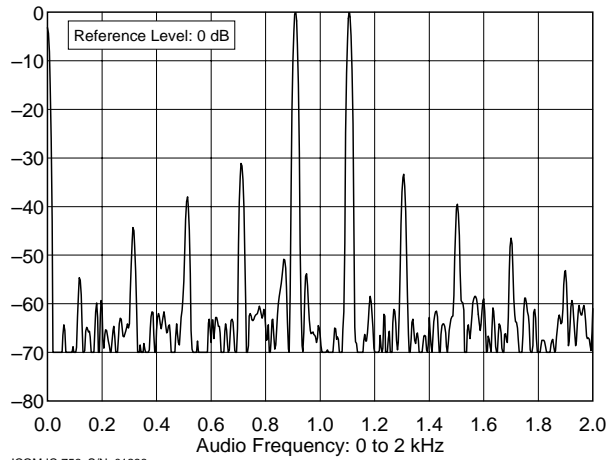

ICOM IC-756 S/N: 01238
14.020 MHz, AGC Fast, In-Band Receiver IMD
P:\TESTS\IC756\IC756IBF.TXT

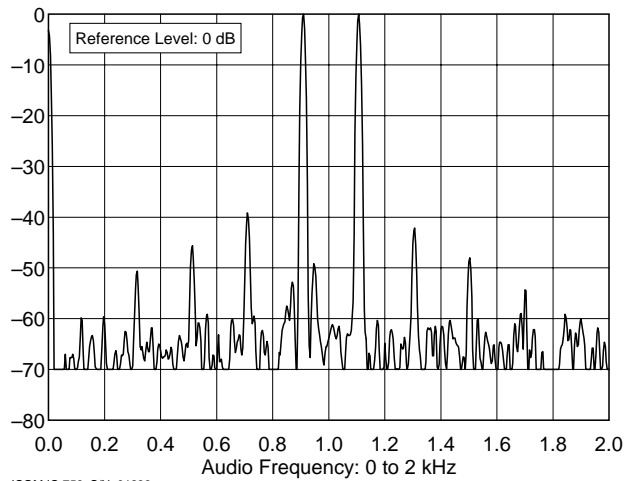

ICOM IC-756 S/N: 01238
14.020 MHz, AGC Mid, In-Band Receiver IMD
P:\TESTS\IC756\IC756IBM.TXT

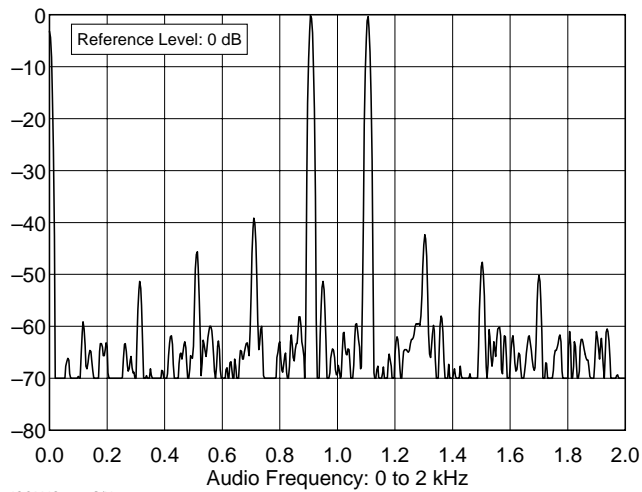

ICOM IC-756 S/N: 01238
14.020 MHz, AGC Mid, In-Band Receiver IMD
P:\TESTS\IC756\IC756IBS.TXT

FM Adjacent Channel Selectivity Test:

Test Description: The purpose of the FM Adjacent Channel Selectivity Test is to measure the ability of the device under test receiver to reject interference from individual undesired signals while receiving various levels of desired signal. The desired carrier signal will be at 29.000 MHz, modulated at 1000 Hz, and the offending signal will be located at adjacent nearby frequencies with 400 Hz modulation. (NOTE: The SINAD Test in 5.3 must be performed before this test can be completed.) The greater the number in dB, the better the rejection.

Test Results:

Frequency (MHz)	Preamplifier	Frequency Spacing (kHz)	Adjacent-channel rejection (dB)	Notes
29.0 MHz	OFF	20 kHz	67.2 dB	
29.0 MHz	ON 1	20 kHz	67.4 dB	
29.0 MHz	ON 2	20 kHz	67.5 dB	
52.0 MHz	OFF	20 kHz	66.6 dB	
52.0 MHz	ON 2	20 kHz	67.1 dB	

Notes:

FM Two-Tone 3rd-Order Dynamic Range Test:

Test Description: The purpose of the FM Two-Tone 3rd Order Dynamic Range Test is to determine the range of signals that can be tolerated by the device under testing the FM mode while producing no spurious responses greater than the 12-dB SINAD level. To perform this test, two signals, f_1 and f_2 , of equal amplitude and spaced 20 kHz apart, are injected into the input of the receiver. The signal located 40 kHz from the distortion product being measured is modulated at 1,000 Hz with a deviation of 3 kHz. The receiver is tuned to the Third Order IMD frequencies as determined by $(2f_1-f_2)$ and $(2f_2-f_1)$. The input signals are then raised simultaneously by equal amounts until 25 % distortion, or the 12 dB SINAD point, is obtained. Frequencies 10 MHz outside the amateur band are used to test the wide-band dynamic range. The greater the dynamic range, the better the receiver performance.

Test Results:

Frequency (MHz)	Preamplifier	Frequency Spacing (kHz)	FM Dynamic Range (dB)	Notes
29 MHz	OFF	20 kHz	72.7 dB*	
29 MHz	ON 1	20 kHz	71.4 dB*	
29 MHz	ON 2	20 kHz	71.5 dB*	
52 MHz	OFF	20 kHz	69.3 dB*	
52 MHz	ON 2	20 kHz	70.1 dB*	

Notes:

* = noise limited at values shown

Image Rejection Test:

Test Description: This test measures the amount of image rejection for superhetrodyne receivers by determining the level of signal input to the receiver at the first IF image frequencies that will produce an audio output equal to the MDS level. The test is conducted with the receiver in the CW mode using the 500 Hz, or closest available, IF filters. Any audio filtering is disabled and AGC is turned OFF, if possible. The test is performed with the receiver tuned to 14.250 MHz for receivers that have 20-meter capability, or to a frequency 20 kHz up from the lower band edge for single-band receivers. The greater the number in dB, the better the image rejection.

Test Results:

Frequency (MHz)	Preamplifier	Mode	Calculated Image Frequency (MHz)	Image Rejection (dB)	Notes
14.250 MHz	OFF	CW	152.2712 MHz	125.5 dB*	
14.250 MHz	ON 1	CW	152.2712 MHz	126.7 dB*	
52.0 MHz	OFF	CW	121.0106 MHz	129.9 dB*	
52.0 MHz	ON 2	CW	121.0106 MHz	125.5 dB*	

Notes:

* = measurement was noise limited at value shown

IF Rejection Test:

Test Description: This test measures the amount of first IF rejection for superhetrodyne receivers by determining the level of signal input to the receiver at the first IF that will produce an audio output equal to the MDS level. The test is conducted with the receiver in the CW mode using the 500 Hz, or closest available, IF filters. Any audio filtering is disabled and AGC is turned OFF, if possible. The test is performed with the receiver tuned to 14.250 MHz for receivers that have 20-meter capability, or to a frequency 20 kHz up from the lower band edge for single-band receivers. The greater the number in dB, the better the IF rejection.

Test Results:

Frequency (MHz)	Preamplifier	Mode	1st IF (MHz)	1st IF Rejection (dB)	Notes
14.250 MHz	OFF	CW	69.0106 MHz	122.5 dB*	
14.250 MHz	ON 1	CW	--	124.4 dB*	
52.0 MHz	OFF	CW	--	132.5 dB*	
52.0 MHz	ON 2	CW	--	122.1 dB*	

Notes:

* = measurement was noise limited at value shown.

Audio Output Power Test:

Test Description: This test measures the audio power delivered by the receiver. The manufacturer's specification for load and distortion are used. For units not specified, an 8-ohm load and 10% harmonic distortion are used.

Test Results:

Specified Distortion	Specified Load Impedance	Audio Output Power (W)	Notes
10 %	8 ohms	2.05 W	

Notes:

IF + Audio Frequency Response Test:

Test Description: The purpose of the IF + Audio Frequency Response Test is to measure the audio frequencies at which the receiver audio drops 6 dB from the peak signal response. The frequency-response bandwidth is then calculated by taking the difference between the lower and upper frequency. See also the receiver passband graphs appended to this report.

Test Results:

IF Filter Use/Unit Mode	Nominal Bandwidth	1st filter/ 2nd filter (Hz)	Center Freq (Hz)	Low Freq (Hz)	High Freq (Hz)	Difference (bandwidth)	Notes
CW Narrow	500 Hz	500/500 Hz	506 Hz	348 Hz	813 Hz	465 Hz	1
CW Wide	2400 Hz	2400/2800 Hz	1411 Hz	216 Hz	2717 Hz	2501 Hz	
USB Narrow	2400kHz	2400/2800 Hz	1586 Hz	239 Hz	2765 Hz	2526 Hz	
USB Wide	2400kHz	2400/9000 Hz	1283 Hz	238 Hz	2898 Hz	2660 Hz	
LSB Narrow	2400 Hz	2400/2800 Hz	1409 Hz	218 Hz	2720 Hz	2502 Hz	
LSB Wide	2400 Hz	2400/9000 Hz	865 Hz	126 Hz	2659 Hz	2533 Hz	
AM Narrow	2400 Hz	2400/2800 Hz	400 Hz	64 Hz	1280 Hz	1216 Hz	
AM Wide	9000 Hz	15000/9000 Hz	1000 Hz	67 Hz	4670Hz	4603 Hz	

Notes:

1. CW pitch control centered for all tests

Squelch Sensitivity Test:

Test Description: The purpose of the Squelch Sensitivity Test is to determine the level of the input signal required to break squelch at the threshold and at the point of maximum squelch. This number is not usually critical. A result anywhere between 0.05 and 0.5 uV is usually useful. The maximum can range to infinity.

Test Results:

Frequency (MHz)	Preamplifier	Mode	Minimum (uV)	Maximum (uV)	Notes
29.0 MHz	OFF	FM	0.219 uV	70.8 mV	
29.0 MHz	ON 1	FM	0.087 uV	21.1 mV	
29.0 MHz	ON 2	FM	0.066 uV	10.0 mV	
52.0 MHz	OFF	FM	0.489 uV	90.2 mV	
52.0 MHz	ON 2	FM	0.371 uV	10.5 mV	
14.2 MHz	OFF	SSB	--	62.3 mV	
14.2 MHz	ON	SSB	--	22.1 mV	

Notes:

-- = not measured.

S-Meter Test:

Test Description: The purpose of the S-Meter Test is to determine the level of RF input signal required to produce an S9 and S9+20 dB indication on the receiver S meter. This test is performed with the receiver in the CW mode at a frequency of 14.200 MHz. The IF filter is set to 500 Hz, nominal. A traditional S9 signal is a level of 50 uV (an old Collins receiver standard). The Collins standard S unit was 6 dB. This is, however, not a hard and fast rule, especially for LED or bar-graph type S meters.

Test Results:

Frequency (MHz)	Preamplifier	S Units	uV	Notes
14.2 MHz	OFF	S9	53.0 uV	
14.2 MHz	ON 1	S9	17.0 uV	
1.02 MHz	ON	S9	170 uV	

Notch Filter Test:

Test Description: This test measures the notch filter depth at 1 kHz audio and the time required for auto-notch DSP filters to detect and notch a signal. The more negative the notch depth number, the better the performance.

Test Results: <add more rows as necessary for different conditions>

Frequency (MHz)	MODE	Notch Depth (dB)	Notes
14.250 MHz	Notch	> 50 dB	

Notes:

Noise Reduction Test

Test Description: There are a number of noise-reduction methods used in modern receivers. Most of them use DSP. In this test, the test engineer uses a test signal that gives about a 20 dB signal-to-noise ratio. The noise reduction is engaged and a measurement or estimate is made of the amount of noise reduction. This is an approximate measurement because the amount of noise reduction is dependent on the original signal-to-noise ratio.

Test Results:

Frequency (MHz)	MODE	Noise reduction (dB)	Notes
14.250 MHz	NR	> 15 dB	

Notes:

Temperature Chamber Test Description:


All equipment that would normally be used outdoors are subjected to a function, output power and frequency accuracy test over its specified temperature range. For those units not specified, the unit is operated at the manufacturer's specified limits, or if not specified, -10 and +60 degrees Celsius. These temperatures were chosen to represent typical specifications and typical outdoor use over most of the country.

Duty Cycle Test Description:


Most equipment does not specify a duty cycle. For this reason, most Product Review equipment is not subject to a specific duty cycle test. It is assumed that equipment without a duty-cycle specification is intended for conversational use on CW or SSB. The equipment sees considerable such use during the review process. If equipment does have a duty-cycle specification, such as "continuous," "continuous commercial" or a specific time parameter, the equipment is tested against that specification. If the unit does not pass, this will be treated as a defect that occurred during the review.

Receiver passband graphs:

ARRL is still refining the test methods to easily generate receiver bandpass data. For the following graphs, we connected an RF-noise source to the input of the receiver and a spectrum analyzer to the output. After about 10 averages, we obtained a reasonable representation of the receiver bandpass, under actual signal-level conditions. As we refine this test a bit more, we will add a section to the report that better defines the test methods, etc.

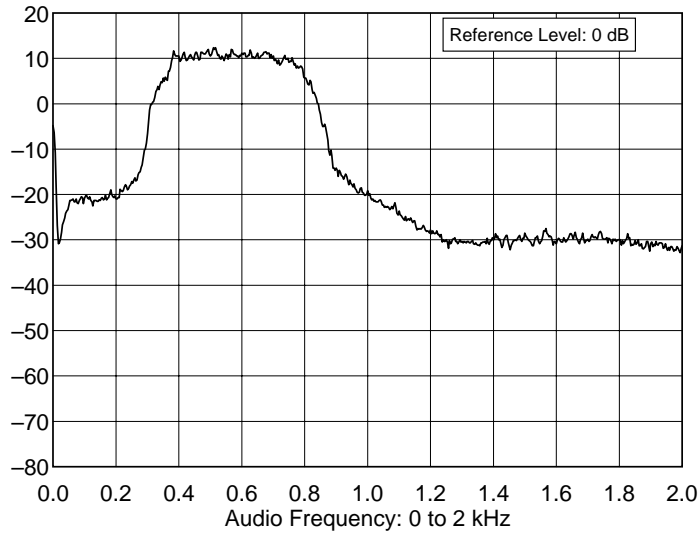

IC-756 Prod Rev unit
14.02 MHz filter bandwidth
S5 noise input level
P:\TESTS\IC756\IC756CW.TXT

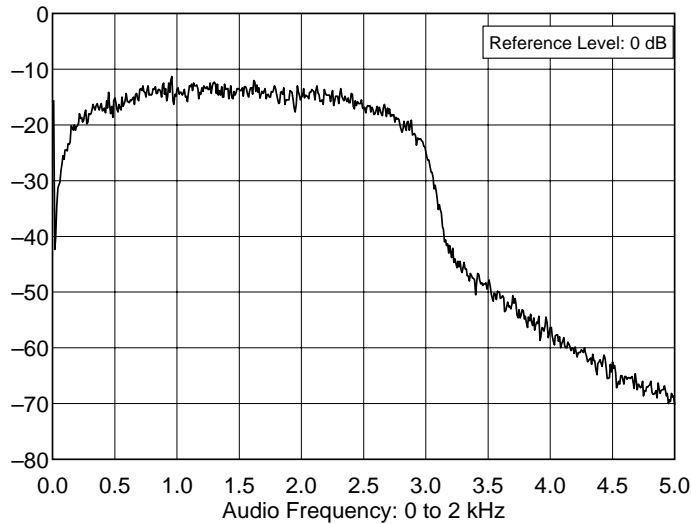

IC-756 Prod Rev unit
14.02 MHz filter bandwidth
S9 noise input level
P:\TESTS\IC756\IC756USB.TXT